

PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1	
PSHVDK	PROSHOWER DRAIN VERTICAL KIT	1	

AREA OF USE

- **Use** - Balconies, terraces, outdoor surfaces of any size, kitchens and showers.
- **Don't use** - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.



PROSHOWER DRAIN LATERAL KIT PSHLDK

PROSHOWER DRAIN VERTICAL KIT PSHVDK

PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with non-woven polypropylene to ensure sealing with the used waterproofing system.

PRODRIP

PERIMETER DRAIN

PERIMETER DRAIN

pack. per pallet = 192


Article	Pcs/Pack.	€/Pc	€/Pack.
PDRP	4		

AREA OF USE

- **Use** - To realise perimeter drains on balconies, terraces and outside horizontal surfaces of any size.
- **Don't use** - With bituminous waterproofing and as vertical drain.

WARNINGS

Do not heat with direct flames and do not use adhesive with solvents. Consult the data sheet prior to application in the case of special applications, we recommend that you consult the technical department.

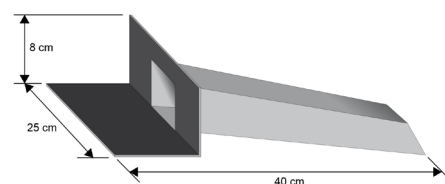

It is a membrane in high density polyethylene. It is covered on top with a polypropylene spunbond and on the back with a non-woven fabric in polypropylene. Both of them are thermo-welded to the polyethylene sheet to guarantee the adhesion of the membrane with the adhesive. **PRODESOSOUND** is an uncoupling and soundproof membrane, with a thickness of 2,3 mm, which does not require any expansion joints before tiling with ceramic or natural stone. **PRODESOSOUND** guarantees the laying of any flooring and the soundproofing up to 17dB in any indoor environment, even in the case of problematic supports and old tiles.

PRODESOSOUND

UNCOUPLING AND SOUNDPROOF MEMBRANE

ROOL - Thickness 2,3 mm


Article	Roll H x L lm	rolls / pallet	€/sq.m.	€/roll	€/pallet
PDSND 30	1 x 20	12			

AREA OF USE

- **Use** - Uncoupling and soundproof membrane also for cracked screeds. It can be laid on cement and gypsum based screed, old ceramic, natural stone floorings, concrete and wood structure. Very resistant to saline solutions, acids and alkalis, alcohol and oils. In case of particular products, contact our technical department.
- **Don't use** - On lightweight screeds not suitable for the laying of flooring. Do not lay with adhesives containing solvents.

WARNINGS

For the laying of PRODESOSOUND use a C2S1 cement based adhesive. Tile immediately after the membrane laying to avoid damages. If it is not possible to tile immediately, the membrane must be protected using running boards. Do not use PRODESOSOUND on substrates subject to continuous rising moisture. For information not included in the Technical Details, please contact our technical department.

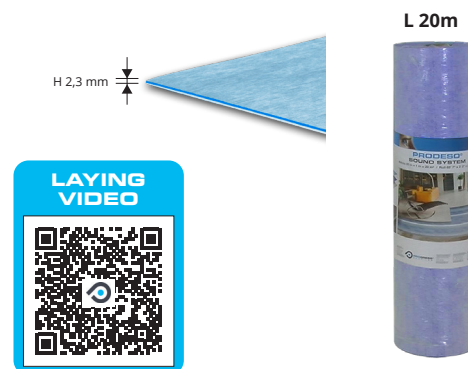


PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.

PROECOFON

EXPANDED POLYETHYLENE CLOSED - CELL WITH ADHESIVE

CLOSED-CELL EXPANDED POLYETHYLENE WITH ADHESIVE

Article	Thick. x H mm	lm/roll	€/lm	€/Roll
PEF 550A	5 X 50	25		
PEF 5100A	5 X 100	100		



Adhesive junction tape for the membrane PRODESOSOUND

PRODESOSOUND TAPE

PRODESOSOUND TAPE - height 50 mm

Article	lm/roll	Pc/Pack	Pc/box	€/roll	€/pack	€/box
PDSNDTP 550	50	6	36			

