




PRODESO® MEMBRANE SYSTEM

UNCOUPLING & WATERPROOFING MEMBRANE

It is an uncoupling and waterproofing membrane for problematic substrates, balconies, terraces and horizontal surfaces of any size without expansion joints in the screed before the laying of ceramic and natural stone. Prodeso ensures the laying of the flooring and the waterproofing of the substrate also in case of old tiles, on cracked and not perfectly cured substrates, and therefore with possible vapour pressure.

NEW DESIGN PATENT

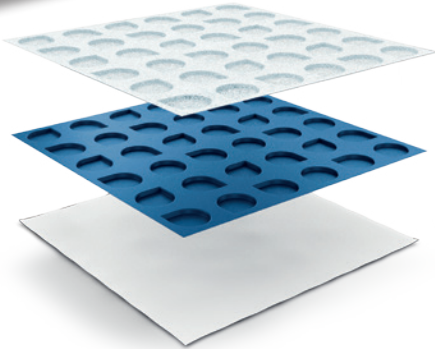

UNCOUPLING & WATERPROOFING MEMBRANE thickness H 3 mm



Article	H Roll (LM)	L Roll (LM)	Rolls x Pallet
PDES 3530/EN	1 3' 3"	30 98' 5"	8

WHY USE PRODESO® MEMBRANE SYSTEM


Time Efficient: Prodeso Membrane reduces drastically the installation times, as it is possible to install tiles right after the membrane is fixed to the subfloor. Same day tile installation saves time and money.

Flexible: it is suitable for multiple types of subfloor including very large surfaces both indoor and outdoor. Can be used with small mosaics floor or very large tiles and thin-tiles.

Safe: it is suitable for substrates with cracks and stress tension as it doesn't transmit tension in the subfloor to the tile coverings and vice versa. It is also suitable on substrates not perfectly aged.

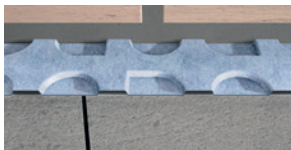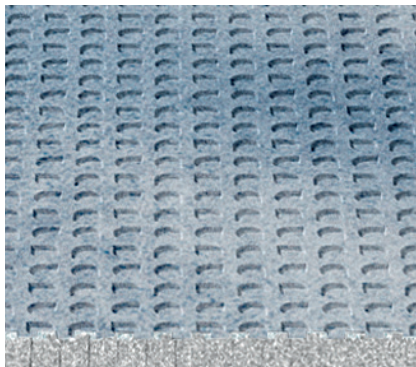

UNCOUPLING

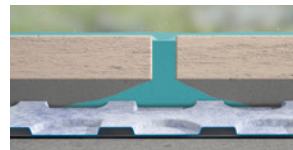


WATERPROOFING




UNCOUPLING



VAPOR AND MOISTURE MANAGEMENT

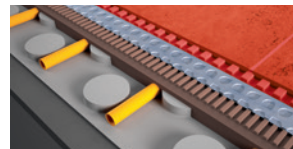


FLOOR HEATING DISTRIBUTION

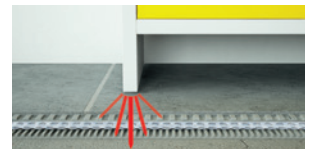

SUPPORT / LOAD DISTRIBUTION

LAYING'S SECTION OF PRODESO® MEMBRANE SYSTEM

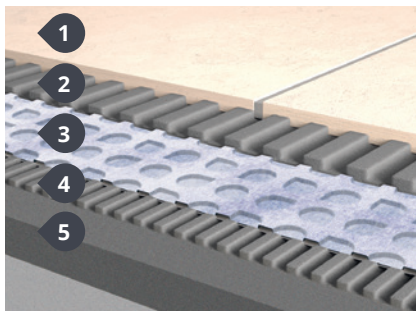

1. Ceramic or porcelain tiles
2. Thin-set / Adhesive
3. PRODESO
4. Thin-set / Adhesive
5. Mortar or Plywood / OSB

