


## PROFOIL

ROLLS IN HDPE AND PP



**PROFOIL** is a waterproofing polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

ROLLS IN HDPE AND PP - Thickness **0,42 mm**

Article	Width roll H x L m	total m <sup>2</sup>			
PFLO 0405	1 x 5	5			
PFLO 0430	1 x 30	30			

### AREAS OF USE

#### • Use

Waterproofing of substrates and vertical structures before the laying of ceramic and stone materials in areas subject to occasional contact with water like bathrooms and kitchens, with high vapor pressure like saunas and Turkish baths and with permanent contact with water also in pressure like swimming pools and tanks. On screed without cracks and completely cured, old ceramic floors and natural stones anchored to the substrate, concrete completely cured and wood supports.

#### • Don't use

On bituminous coverings, over insulating panels and lightweight screed.

### WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

## PROBAND 150/250

ROLLS IN HDPE AND PP




ROLLS IN HDPE AND PP - Thickness **0,42 mm**

Article	Roll width H mm x L m	Rolls/ Pack.			
PRBPE 1505	150 x 5	10			
PRBPE 1530	150 x 30	6			
PRBPE 2505	250 x 5	5			
PRBPE 2530	250 x 30	3			

AREAS OF USE AND WARNINGS see pag 161

## WELDED CORNERS and PIPE COLLAR

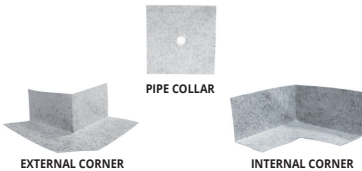

Internal and external welded corners and pipe collar in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.

### WELDED CORNERS and PIPE COLLAR IN HDPE AND PP


Thickness **0,42 mm**

Article	H x L mm	Rolls/Pack.			
PRBI (internal)	150 x 150	10 Pcs			
PRBE (external)	150 x 150	10 Pcs			
PRBT (pipe collar)	125 x 125	10 Pcs			

AREAS OF USE AND WARNINGS see pag 161

## PRODRAIN 10

DRAINAGE MEMBRANE



### DRAINAGE MEMBRANE

Thickness **H 10 mm** - Total **12,0 m<sup>2</sup>** - **6 ROLLS PER PALLET = 72 m<sup>2</sup>**

Article	H roll (MT)	L roll (MT)	roll x pallet		
PDRI 10		12,5	6		

### AREAS OF USE

#### • Use

Outside on concrete sloping suitably waterproofed such as terraces, balconies and pavements and in contact with waterproofed vertical structures such as foundation walls. Highly resistant to saline solutions, acid and alkaline, alcohol and oils. In case of special products consult the technical department.

#### • Don't use

On concrete waterproofed without adequate slope to the drained water runoff. As soundproof and thermal-insulating layer.

### WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications call the technical department.