

PROTERRACE DRAIN FDP



DESCRIPTION

PROTERRACE DRAIN FDP is an edging profile in aluminium designed to protect the screed and the edges of the tiles laid on terraces and balconies. Thanks to its ease of application and availability in different colours, is a much sought-after profile.

MATERIAL

PROTERRACE DRAIN FDP is an edging profile in powder coated aluminium designed to protect the screed and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange with a width of 75 mm, that ensures its fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical side of the profile, with a height of 65 and 67.5 mm, covers and protects the tile edges. The profile is also provided with holes every 10 cm apart. These holes, 15 mm length and 3 mm width, allow the discharge of the water filtered between the profile and tiles. The availability of special pieces such as the external corners and junctions make **PROTERRACE DRAIN FDP** a much sought after and easy to lay profile.

AREAS OF USE

PROTERRACE DRAIN FDP in powder coated aluminium is an edging profile for terraces, balconies and overhead structures.

WARNINGS



Do not use **PROTERRACE DRAIN FDP** in powder coated aluminium in swimming pools, in seafront environments and where a high chemical aggression is expected.

MAINTENANCE

PROTERRACE DRAIN FDP does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROTERRACE DRAIN FDP**" according to the tile thickness and desired colour.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "**PROTERRACE DRAIN FDP**" to the desired length. Lay the profile and fix it with nails; connect it with the corners using the junction elements.
4. Apply the desired waterproofing system.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with **PROBAND FIX**.

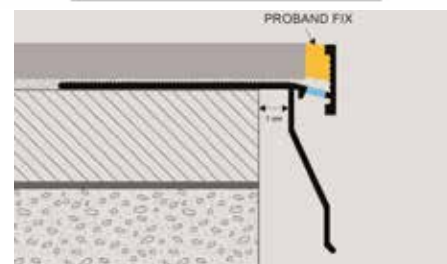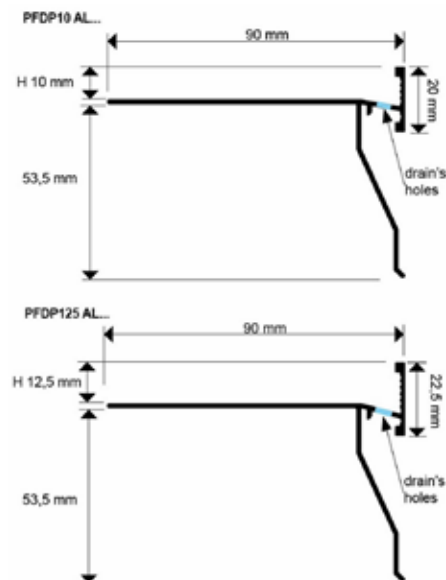

TEXT TEMPLATE FOR TENDERS

Delivery and installation of edging profile in powder coated aluminium in.....colour. Equipped with a punched flange with a width of 75 mm, that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical side of the profile, with a height of 65 / 67.5 mm, protects the screed and the edges of the tiles. The profile is also provided with holes every 10 cm apart. These holes, 15 mm length and 3 mm width, allow the discharge of the water filtered between the profile and tiles, like PROTERRACE DRAIN FDP of the Progress Profiles company.

PFDP 10 / 125AL... : Powder coater aluminium.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt