

# PROTERRACE PC



## DESCRIPTION


**PROTERRACE PC** is a stainless steel edging profile designed to protect the front of screed from water penetration. Thanks to its ease of application and availability in different height, it is a much sought-after profile.

## MATERIAL

**PROTERRACE PC** is an edging profile in polished stainless steel AISI 304/1.4301 -V2A. It is designed to protect the front of the screed from water penetration. The profile is equipped with a punched flange with a width of 80 mm, that ensures its fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 55, 75 and 95 mm, protects the front of the screed from water penetration. Thanks to special pieces such as the external corners and junctions and the availability in three heights **PROTERRACE PC** is a much sought after and easy to lay profile.

## AREAS OF USE

**PROTERRACE PC** in stainless steel AISI 304/1.4301 – V2A is an edging profile for terraces, balconies and overhead structures.

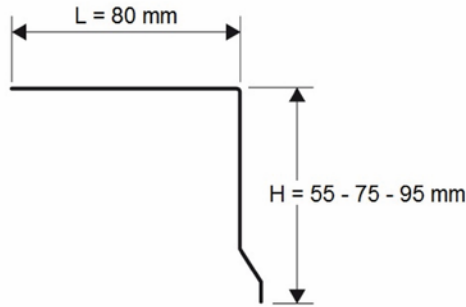

## WARNINGS


Do not use **PROTERRACE PC** in stainless steel AISI 304/1.4301 – V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommend to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

## MAINTENANCE

**PROTERRACE PC** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "**PROTERRACE PC**" according to the height and desired colour.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "**PROTERRACE PC**" to the desired length. Lay the profile and fix it with nails; connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles.

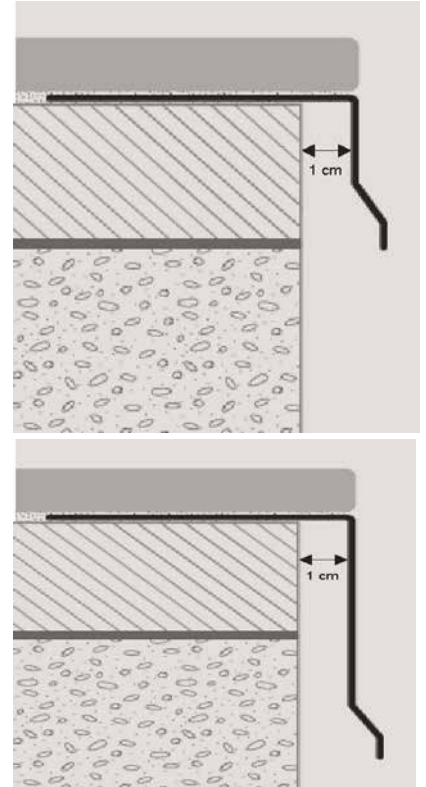

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of edging profile in polished stainless steel AISI 304/1.4301-V2A. Equipped with a punched flange with a width of 80 mm, that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 55 / 75 / 95 mm protects the screed from water penetration, like PROTERRACE PC of the Progress Profiles company.

**PC 80... AC:** Polished stainless steel AISI 304/1.4301 - V2A

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Installation : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt