


PROTERRACE PC

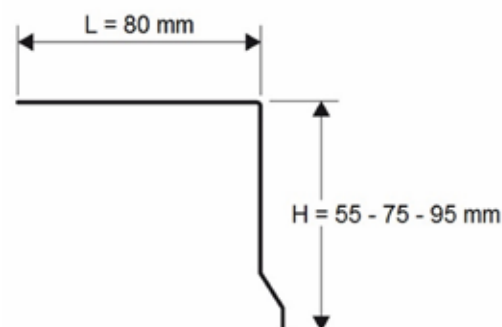

DESCRIPTION

PROTERRACE PC is an aluminium edging profile designed to protect the front of screed from water penetration. Thanks to its ease of application and availability in different height, it is a much sought-after profile.

MATERIAL

PROTERRACE PC is an edging profile in powder coated aluminium designed to protect the front of screed from water penetration and to allow correct water discharge. The profile, available in different colours, is equipped with a punched flange with a width of 80 mm, that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 55, 75 and 95 mm, protects the screed and ensures proper discharge of rainwater. Thanks to special pieces such as the external corners and junctions and the availability in different colours **PROTERRACE PC** is a much sought after and easy to lay profile.

AREAS OF USE

PROTERRACE PC in aluminium is an edging profile for terraces, balconies and overhead structures.

WARNINGS


Do not use **PROTERRACE PC** in powder coated aluminium in swimming pools, in seafront environments and where a high chemical aggression is expected.

MAINTENANCE

PROTERRACE PC does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROTERRACE PC**" according to the tile thickness and desired colour.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "**PROTERRACE PC**" to the desired length. Lay the profile and fix it with nails; connect it with the corners using the junctions.
4. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
5. Lay the tiles.

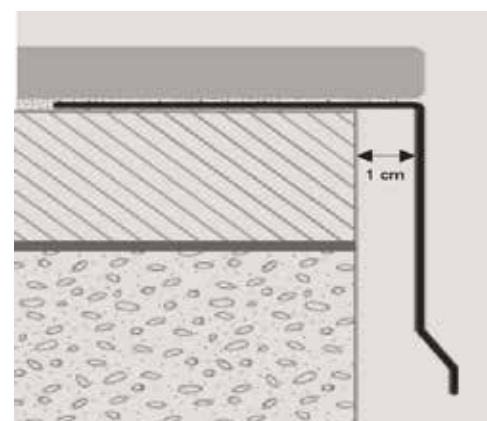

TEXT TEMPLATE FOR TENDERS

Delivery and installation of edging profile powder coated aluminium in.....colour. Equipped with a punched flange with a width of 80 mm, that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 55 / 75 / 95 mm protects the screed and ensures proper discharge of rainwater, like PROTERRACE PC of the Progress Profiles company.

PC 80...AL....: Powder coated aluminium

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Installation : _____ €/mt
 Total value : _____ €/mt