




PROTERRACE PCG

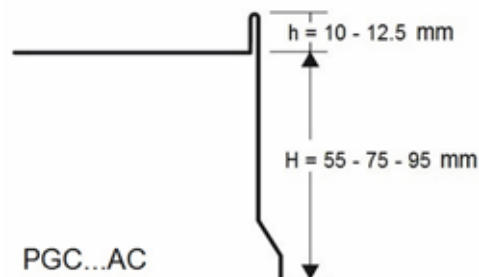

DESCRIPTION

PROTERRACE PCG is a stainless steel edging profile designed to protect the edges of the tiles and to ensure proper water discharge. Thanks to its ease of application and availability in different heights, it is a much sought-after profile.

MATERIAL

PROTERRACE PCG is an edging profile in polished stainless steel AISI 304/1.4301-V2A. It is designed to protect the edges of the tiles and to allow correct water discharge. The profile is equipped with a punched flange with a width of 80 mm, that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm, that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 65 - 67.5 - 85 - 87.5 - 105 and 107.5 mm, protects the tile edges and ensures proper discharge of rainwater. Thanks to special pieces such as the external corners and junctions and the availability in different heights, **PROTERRACE PCG** is a much sought after and easy to lay profile.

AREAS OF USE

PROTERRACE PCG in stainless steel AISI 304/1.4301 - V2A is an edging profile for terraces, balconies and overhead structures.

WARNINGS


Do not use **PROTERRACE PCG** in stainless steel AISI 304/1.4301 - V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommended to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

MAINTENANCE

PROTERRACE PCG does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROTERRACE PCG**" according to the tile thickness.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "**PROTERRACE PCG**" to the desired length. Lay the profile and fix it with nails; connect it with the corners using the junctions.
4. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with **PROBAND FIX**.

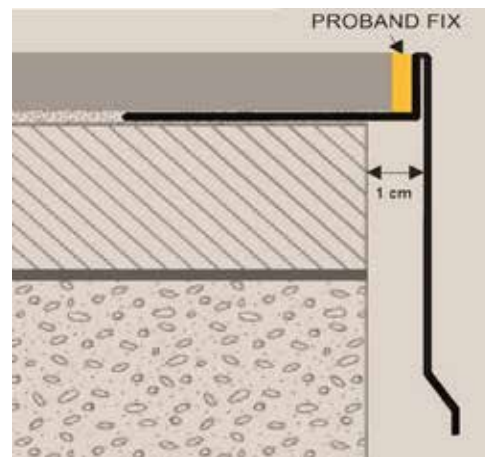

TEXT TEMPLATE FOR TENDERS

Delivery and installation of edging profile in polished stainless steel AISI 304/1.4301-V2A. Equipped with a punched flange with a width of 80 mm that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 65 / 67.5 / 85 / 87.5 / 105 / 107.5 mm, protects the edges of the tiles and ensures proper discharge of rainwater, like **PROTERRACE PCG** of the Progress Profiles company.

PCG ... AC: Polished stainless steel AISI 304/1.4301-V2A

Profile height : _____ mm
 Profile lenght : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt

