




## PROTERRACE PCG

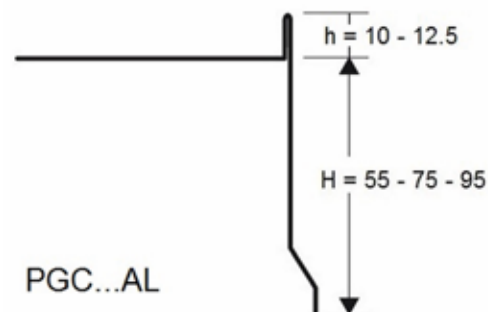

### DESCRIPTION

**PROTERRACE PCG** is an aluminium edging profile designed to protect the edges of the tiles and to ensure proper water discharge. Thanks to its ease of application and availability in different colours, it is a much sought-after profile.

### MATERIAL

**PROTERRACE PCG** is an edging profile in powder coated aluminium designed to protect the edges of the tiles and to allow correct water discharge. The profile, available in different colours, is equipped with a punched flange with a width of 80 mm, that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm, that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 65 - 67,5 - 85 - 87,5 - 105 and 107,5 mm, protects the tile edges and ensures proper discharge of rainwater. Thanks to special pieces such as the external corners and junctions and the availability in different colours **PROTERRACE PCG** is a much sought after and easy to lay profile.

### AREAS OF USE

**PROTERRACE PCG** in aluminium is an edging profile for terraces, balconies and overhead structures.

### WARNINGS


Do not use **PROTERRACE PCG** in powder coated aluminium in swimming pools, in seafront environments and where a high chemical aggression is expected.

### MAINTENANCE

**PROTERRACE PCG** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

### LAYING INSTRUCTIONS

1. Choose "**PROTERRACE PCG**" according to the tile thickness and desired colour.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "**PROTERRACE PCG**" to the desired length. Lay the profile and fix it with nails; connect it to the corners using the junctions.
4. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with **PROBAND FIX**.

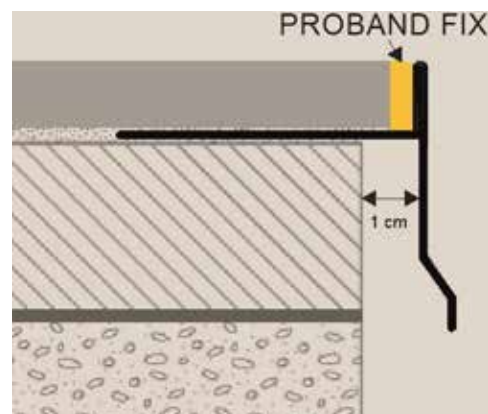

### TEXT TEMPLATE FOR TENDERS

Delivery and installation of edging profile in powder coated aluminium in.....colour. Equipped with a punched flange with a width of 80 mm, that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 65 / 67,5 / 85 / 87,5 / 105 / 107,5 mm, protects the edges of the tiles and ensures proper discharge of rainwater, like PROTERRACE PCG of the Progress Profiles company.

**PCG ...AL....**: Powder coated aluminium

Profile height : \_\_\_\_\_ mm  
Profile length : \_\_\_\_\_ mt  
Material : \_\_\_\_\_ €/mt  
Application : \_\_\_\_\_ €/mt  
Total value : \_\_\_\_\_ €/mt