


PROTERRACE PTER

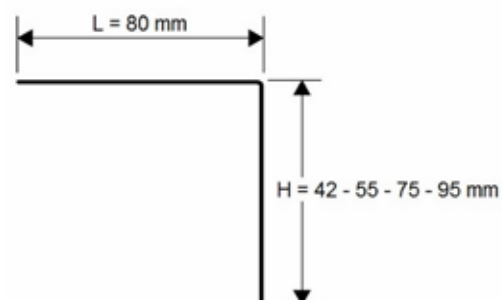

DESCRIPTION

PROTERRACE PTER is a stainless steel edging profile designed to protect the screed.

Thanks to its ease of application and availability in different colours, it is a much sought-after profile.

MATERIAL

PROTERRACE PTER is an edging profile in polished stainless steel AISI 304/1.4301-V2A. It is designed to protect the screed. The profile is equipped with a punched flange with a width of 80 mm, that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 42 - 55 - 75 and 95 mm, protects the screed. Thanks to special pieces such as the external corners and junctions and the availability in different height, **PROTERRACE PTER** is a much sought after and easy to lay profile.

AREAS OF USE

PROTERRACE PTER in stainless steel AISI 304/1.4301 - V2A is an edging profile for terraces, balconies and overhead structures.

WARNINGS

Do not use **PROTERRACE PTER** in stainless steel AISI 304/1.4301 - V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommended to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.


PROTERRACE PTER does not allow correct water flow.

MAINTENANCE

PROTERRACE PTER does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROTERRACE PTER**" according to the height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "**PROTERRACE PTER**" to the desired length. Lay the profile and fix it with nails; connect it to the corners using the junctions.
4. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
5. Lay the tiles.

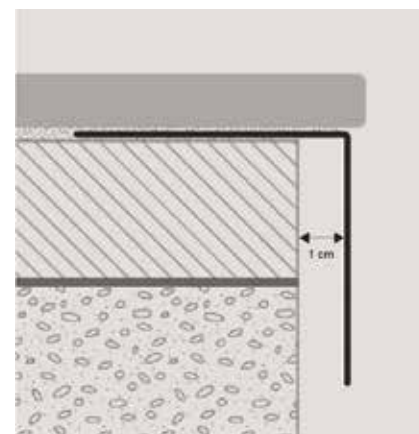

TEXT TEMPLATE FOR TENDERS

Delivery and installation of edging profile in polished stainless steel AISI 304/1.4301-V2A. Equipped with a punched flange with a width of 80 mm that ensures the profile fixing to the support. The flange is also provided with small holes with a diameter of 2.5 mm that allow the momentary fixing of the profile with nails. The vertical part of the profile, with a height of 55 / 75 / 95 mm, protects the screed, like PROTERRACE PTER of the Progress Profiles company.

PTER 8042 / 8055 / 8075 / 8095AC : Polished stainless steel AISI 304/1.4301-V2A

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt