



PROPLATE

POLISHED STAINLESS 1.4016 STEEL
SELF-ADHESIVE OR PUNCHED

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 – 30 – 40 – 60 – 80 mm with protective film.

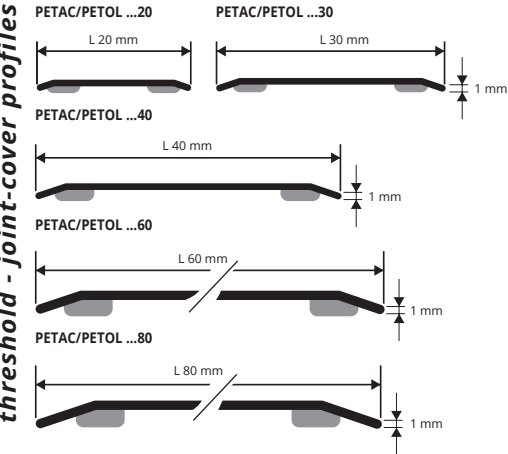

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

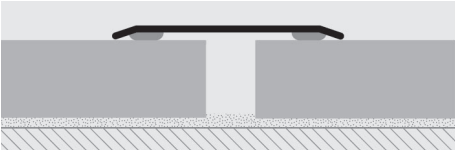

1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.



POLISHED STAINLESS 1.4016 ST. thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 - 30mm - 108 lm) - 10/10 mm

Article	Width		
PETAC 20A (adhesive)	20mm		
PETAC 30A (adhesive)	30mm		
PETAC 40A (adhesive)	40mm		
PETAC 60A (adhesive)	60mm		
PETAC 80A (adhesive)	80mm		

POLISHED STAINLESS 1.4016 STEEL thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	Width		
PETAC 60 (without holes)	60mm		
PETAC 80 (without holes)	80mm		

PETAC 60A/80A/60/80, with 12/10 thickness available on demand.

PUNCHED POLISHED STAINLESS 1.4016 ST. with protective film
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30mm - 108 lm) - 10/10 mm

Article	Width		
PETAC 30F (punched)	30mm		
PETAC 40F (punched)	40mm		



POLISHED STAINLESS 1.4016 ST. thermo packed
bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	
PETAC 309AS (adhesive)	30mm	
PETAC 309FS (punched with screws)	30mm	
PETAC 609AS (adhesive)	60mm	
PETAC 809AS (adhesive)	80mm	

COLOURS




AC - Polished stainless steel 1.4016

PROPLATE

POLISHED BRASS
SELF-ADHESIVE OR PUNCHED

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in polished brass with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 – 30 – 40 – 60 – 80 mm with protective film.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

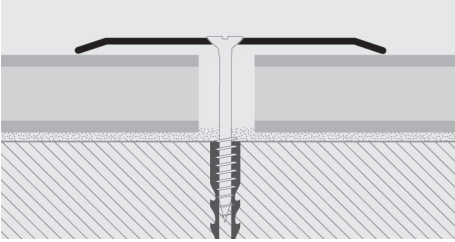

1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.

COLOURS



OL - Polished brass



POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20/30mm - 108 lm) - 10/10 mm

Article	Width		
PETOL 20A (adhesive)	20mm		
PETOL 30A (adhesive)	30mm		
PETOL 40A (adhesive)	40mm		
PETOL 60A (adhesive)	60mm		
PETOL 80A (adhesive)	80mm		

POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 mm - 108 lm) - 10/10 mm

Article	Width		
PETOL 20 (without holes)	20mm		
PETOL 60 (without holes)	60mm		
PETOL 80 (without holes)	80mm		

PETOL 60A/80A/60/80 with 13/10 thickness available on demand.

POLISHED BRASS with protective film
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm) - 10/10 mm

Article	Width		
PETOL 30F (punched)	30mm		
PETOL 40F (punched)	40mm		

POLISHED BRASS thermo packed
bar length 0,83 lm - pack. 20 Pcs - 10/10 mm

Article	Width	
PETOL 308AS (adhesive)	30mm	
PETOL 408AS (adhesive)	40mm	

POLISHED BRASS thermo packed
bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	
PETOL 309AS (adhesive)	30mm	
PETOL 309FS (punched with screws)	30mm	
PETOL 409AS (adhesive)	40mm	
PETOL 409FS (punched with screws)	40mm	
PETOL 609AS (adhesive)	60mm	
PETOL 809AS (adhesive)	80mm	

POLISHED BRASS thermo packed
bar length 1,03 lm - pack. 20 Pcs - 10/10 mm

Article	Width	
PETOL 3010AS (adhesive)	30mm	
PETOL 4010AS (adhesive)	40mm	
PETOL 4010FS (punched with screws)	40mm	

POLISHED BRASS thermo packed
bar length 1,66 lm - pack. 20 Pcs - 10/10 mm

Article	Width	
PETOL 3016AS (adhesive)	30mm	
PETOL 4016AS (adhesive)	40mm	

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed