

PROPLATE 80 ALZ is a new aluminium joint cover, threshold cover. It is very resistant and suitable for covering the expanding joint of two different supporting structures, or to connect a floor with an adjoining one of the same or different kind. Particularly used in Industrial field, in the malls, sport facilities and gyms equipped with wood and/or resin floors.

PROPLATE 80 ALZ

KNURLED ANODIZED SILVER ALUMINIUM




Punched version available on demand.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)


Article	Width mm		
PETAA 80ZA (adhesive)	80		
PETAA 80Z	80		

COLOURS




AA - Anodized silver alum.

PETAA 80ZA
PETAA 80Z



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

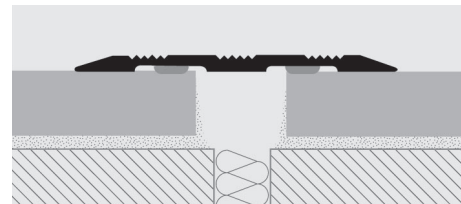

1. Choose "PROPLATE 80ALZ" model with or without sticker and cut it to the required length.

Adhesive version

2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker (sticker model). 4. Rest the square pressing evenly without hammering.

Punched version


2. Perforate on one side and insert the nogs in the holes. 3. Fix and screw the square equipped with flared head screws suitable to the holes made.

threshold - joint-cover profiles

PROCOVER 14PT is a small aluminium joint cover / threshold cover square. It is used to finish technically floors laid at the same level in ceramic tiles/ ceramics ceramics / wood. It covers eventual laying flaws and guarantees that the floors which are underneath expand enough. In Gold-Silk anodized Aluminium and Bronze with sticker.

PROCOVER 14PT

ANODIZED SILVER, GOLD AND BRONZE ALUMINIUM

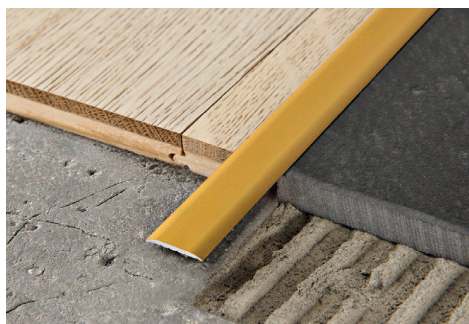

ANODIZED ALUMINIUM WITH ADHESIVE thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Width mm		
PCRAA 14PTA	14		
PCRAO 14PTA	14		*
PCRAB 14PTA	14		*

COLOURS




AA - Anodized silver alum.

PCRAA 14PTA
PCRAO 14PTA
PCRAB 14PTA



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

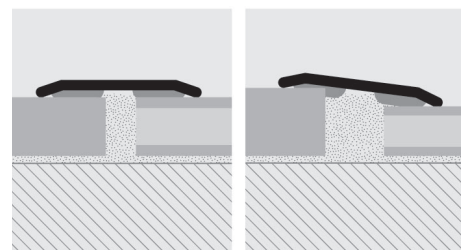

1. Choose the superficial finish of "PROCOVER 14PT" and cut it to the required lenght. 2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker. 4. Lay the square pressing evenly without hammering.

threshold - joint-cover profiles

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



AO - Anodized gold alum. AB - Anodized bronze alum.

(Price to be agreed. Production delay 4/5 weeks)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed