

PROSOL 18-30-35-40 in brass are self-adhesive joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

POLISHED BRASS WITH SELF-ADHESIVE
WITH PROTECTIVE FILM

FLOORS



POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSOL 18A	18 mm - 10/10		
PLSOL 30A	30 mm - 10/10		
PLSOL 35A	35 mm - 10/10		
PLSOL 40A	40 mm - 10/10		

POLISHED BRASS with adhesive thermo packed
bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/lm
PLSOL 308AS	30 mm - 10/10	
PLSOL 358AS	35 mm - 10/10	

POLISHED BRASS with adhesive thermo packed
bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/lm
PLSOL 308A	30 mm - 10/10	

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

POLISHED BRASS with adhesive thermo packed
bar length 0,90 lm - pack. 20 Pcs

Article	Width-thick.	€/lm
PLSOL 189A	10 mm - 10/10	

POLISHED BRASS with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/lm
PLSOL 309A	30 mm - 10/10	
PLSOL 359A	35 mm - 10/10	
PLSOL 409A	40 mm - 10/10	

POLISHED BRASS with adhesive thermo packed
bar length 1,03 lm - pack. 20 Pcs

Article	Width-thick.	€/lm
PLSOL 3010A	30 mm - 10/10	

POLISHED BRASS with adhesive thermo packed
bar length 1,66 lm - pack. 20 Pcs

Article	Width-thick.	€/lm
PLSOL 3016A	30 mm - 10/10	

POLISHED BRASS with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/lm
PLSOL 309AS	30 mm - 10/10	
PLSOL 359AS	35 mm - 10/10	
PLSOL 409AS	40 mm - 10/10	

POLISHED BRASS with adhesive thermo packed
bar length 1,03 lm - pack. 20 Pcs

Article	Width-thick.	€/lm
PLSOL 3010AS	30 mm - 10/10	
PLSOL 3510AS	35 mm - 10/10	

POLISHED BRASS with adhesive thermo packed
bar length 1,66 lm - pack. 20 Pcs


Article	Width-thick.	€/lm
PLSOL 3016AS	30 mm - 10/10	
PLSOL 3516AS	35 mm - 10/10	
PLSOL 4016AS	40 mm - 10/10	

COLOURS




OL - Polished brass


PLSOL 18A/189A
scale 1:1




PLSOL 30A/308A/309A/3010A/3016A/308AS/309AS/3010AS/3016AS
scale 1:1



PLSOL 35A/359A/358AS/359AS/3510AS/3516AS
scale 1:1





PLSOL 40S/409S/409SS/416SS
scale 1:1



threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

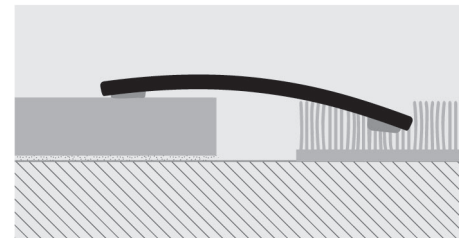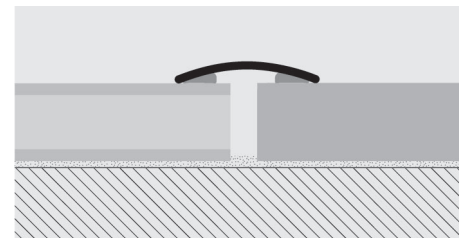

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.