


PRO CURVE LINE

PRO CURVE LINE are a range of profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. The profiles in the PRO CURVE LINE may be used as transition or edging profiles or to create joining and expansion joints on any type of ceramic, parquet, wood, laminate/melamine coated wood, marble, carpeted, Palladian, Venetian floor, etc. The profiles are made in AISI 304/1.4301-V2A stainless steel, aluminium and brass and may be easily shaped by using the PROCURVE MACHINE to bend the profiles mechanically.

PROTERMINAL CURVE

STAINLESS STEEL AISI 304/1.4301-V2A
CURVABLE


PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm. The product is made in stainless steel AISI 304/1.4301-V2A in various heights (6, 8, 10, 12,5, 15 and 20 mm) in 2.7 m bars.

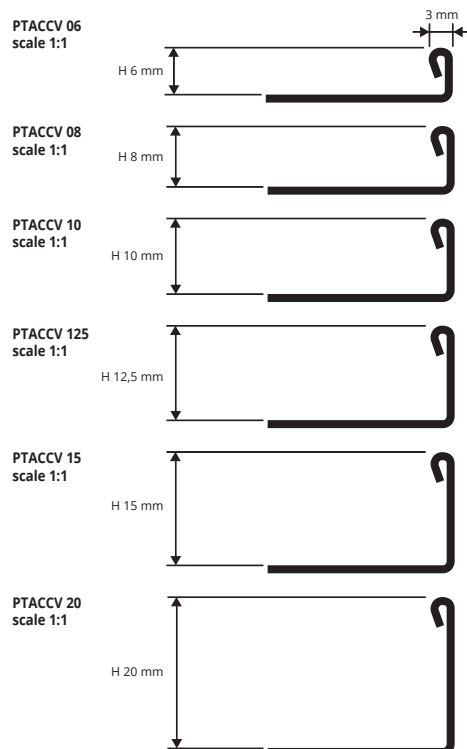

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack 20 Pcs - 54 lm - 10/10 mm

| Article | H mm | €/lm | €/Pc |
|------------|------|------|------|
| PTACCV 06 | 6 | | |
| PTACCV 08 | 8 | | |
| PTACCV 10 | 10 | | |
| PTACCV 125 | 12,5 | | |
| PTACCV 15 | 15 | | |
| PTACCV 20 | 20 | | |


For hand-brushed version + 30% gross price.

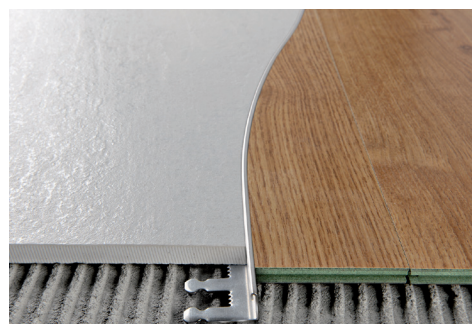

COLOURS




EXAMPLES OF LAYING

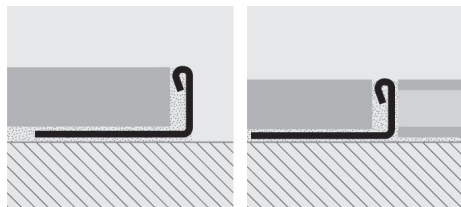

LAYING INSTRUCTIONS

1. Choose the "PROTERMINAL CURVE" with the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. If it is used as a joining profile, bring each floor to the edge of the profile.

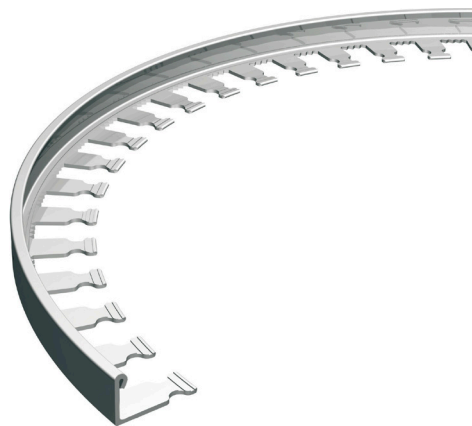

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS