



PROFINAL

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

PROFINAL is a profile in stainless steel AISI 304/1.4301-V2A polished or satin. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PRFAC 08	8		
PRFAC 10	10		
PRFAC 125	12,5		

COLOURS




SATIN FINISH STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PRFACS 08	8		
PRFACS 10	10		
PRFACS 125	12,5		


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROFINAL

NATURAL, POLISHED AND
CHROMED BRASS

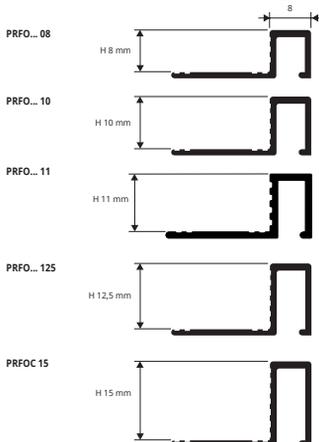

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROFINAL is a profile in natural, polished and chromed brass. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.



NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFON 08	8		
PRFON 10	10		
PRFON 125	12,5		

COLOURS



POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFOL 08	8		
PRFOL 10	10		
PRFOL 125	12,5		

CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 15 mm - 40,5 lm)

Article	H mm		
PRFOC 08	8		
PRFOC 10	10		
PRFOC 11	11		
PRFOC 125	12,5		
PRFOC 15	15		

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidel, Smac and similar.

* = On demand, price and delivery time to be agreed.