


TERMINAL PIN

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **TERMINAL PIN** series consists in a wide range of terminal/ outer joint squares ideal to realize the connection and junction with floors in laminate or melamine and/or wood/parquet rolled floor. The **TERMINAL PIN** allows the floor underneath to expand for more than 5 / 10 mm. It prevents from the use of the skirting -board and covers perfectly any kind of floor with a minimum thickness of 7 mm and a maximum of 22 mm. It delimitates the floor in proximity of walls, coverings, windows, doors, sliding doors, doormats buss etc.

terminal - outer profiles

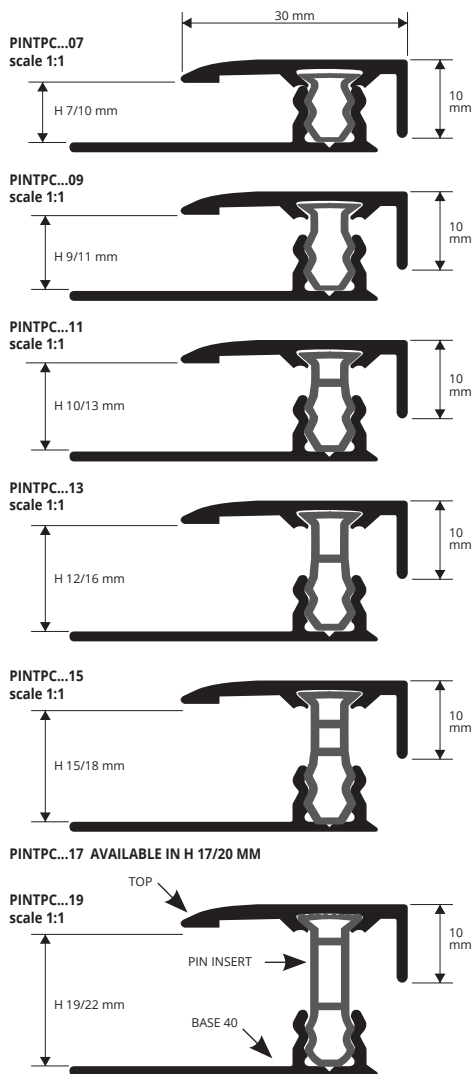

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINTPC... 07 (PIN 07)	7 / 10		
PINTPC... 09 (PIN 09)	9 / 11		
PINTPC... 11 (PIN 11)	10 / 13		
PINTPC... 13 (PIN 13)	12 / 16		
PINTPC... 15 (PIN 15)	15 / 18		
PINTPC... 17 (PIN 17)	17 / 20		
PINTPC... 19 (PIN 19)	19 / 22		

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINTPC... 07S (PIN 07)	7 / 10	
PINTPC... 09S (PIN 09)	9 / 11	
PINTPC... 11S (PIN 11)	10 / 13	
PINTPC... 13S (PIN 13)	12 / 16	
PINTPC... 15S (PIN 15)	15 / 18	
PINTPC... 17S (PIN 17)	17 / 20	
PINTPC... 19S (PIN 19)	19 / 22	



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (80 wooden finishes of which 49 on demand) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINTPC... 07 (PIN 07)	7 / 10		
PINTPC... 09 (PIN 09)	9 / 11		
PINTPC... 11 (PIN 11)	10 / 13		
PINTPC... 13 (PIN 13)	12 / 16		
PINTPC... 15 (PIN 15)	15 / 18		
PINTPC... 17 (PIN 17)	17 / 20		
PINTPC... 19 (PIN 19)	19 / 22		

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (80 wooden finishes of which 49 on demand) thermo packed L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINTPC... 07S (PIN 07)	7 / 10	
PINTPC... 09S (PIN 09)	9 / 11	
PINTPC... 11S (PIN 11)	10 / 13	
PINTPC... 13S (PIN 13)	12 / 16	
PINTPC... 15S (PIN 15)	15 / 18	
PINTPC... 17S (PIN 17)	17 / 20	
PINTPC... 19S (PIN 19)	19 / 22	



Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINTPC... 07S (chosen finish anod. gold) PINTPCAO 07S.

ANODIZED COLOURS



*ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



* WOODEN COLOURS ON DEMAND



On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix PINBFTL 40 base at the outer edge/wall.
2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on each side to accommodate the natural expansion between the floor and the base.
3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base.
4. With the aid of a board, hammer the TOP to the desired fitting level.