




LVT - SOL 30 P

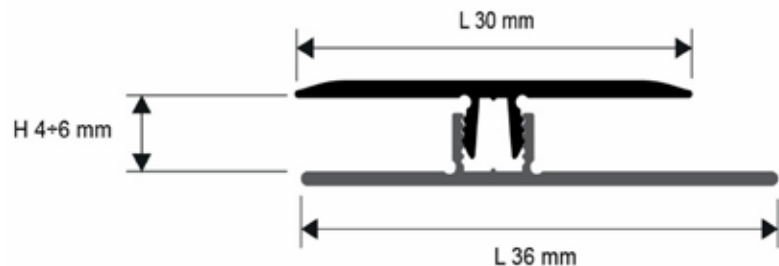

DESCRIPTION

LVT - SOL 30 P is a profile that allows to connect two LVT flooring, working as an expansion joint. The profile is composed by a BASE in rigid vinyl resin and by a TOP in aluminium. Its particular design and the big range of finishes, make it a much-sought after profile that can be used with any vinyl resin floors.

MATERIAL

LVT - SOL 30 P is a profile that allows to connect two LVT flooring, working as an expansion joint. The profile is composed by a BASE in rigid vinyl resin, with a width of 36 mm and by a TOP in aluminium with a visible surface of 30 mm. The BASE is punched and perforated to ensure its fixing with adhesive or screws. The TOP is available in anodized gold / silver / bronze aluminium and is very resistant to commonly used cleaning products. Its particular design and the big range of finishes make **LVT - SOL 30 P** a much-sought after profile that can be used with any vinyl resin floors.

AREAS OF USE

LVT - SOL 30 P in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

WARNINGS


Do not use **LVT - SOL 30 P** in anodized aluminium in the swimming pool, outdoor and in environments where aggressive substances are used.

MAINTENANCE

LVT - SOL 30 P does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**LVT - SOL 30 P**" in the desired finish.
2. Cut the rigid vinyl resin BASE at the desired length and fix it with adhesive or screws.
3. Lay the vinyl resin floors making sure to leave a 5 mm joint between the BASE and the floor.
4. Cut the aluminum TOP at the desired length.
5. Place a wooden board on the aluminium TOP and hammer evenly, favoring the insertion of the TOP into the BASE.

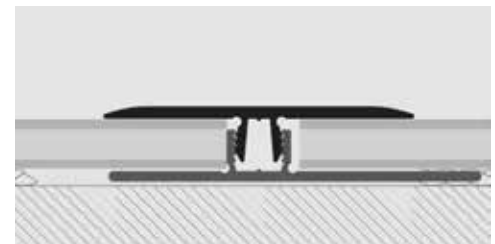

TEXT TEMPLATE FOR TENDERS

Supply and installation of profile that allows to connect two LVT flooring, working as an expansion joint. It is composed by a BASE in rigid vinyl resin and by a TOP in aluminium. The Base, perforated and punched to ensure its fixing, has a width of 36 mm. The TOP in anodized gold / silver / bronze aluminium, has a visible surface of 30 mm, like LVT - SOL 30 P of the Progress Profiles company.

PNSP... 3046 : TOP in anodized aluminium

PINBFT 3646 : BASE in rigid vinyl resin

Profile height : _____ mm

Profile length : _____ mt

Material : _____ €/mt

Application : _____ €/mt

Total value : _____ €/mt