




ZERO CURVE

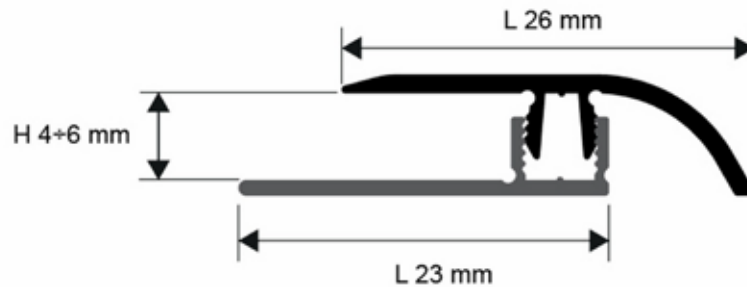

DESCRIPTION

LVT - ZERO CURVE is a profile that allows to connect LVT flooring to another one at a lower level, working as an expansion joint. The profile is composed by a BASE in rigid vinyl resin and by a TOP in aluminium. Its particular design and the big range of finishes, make it a much-sought after profile that can be used with any vinyl resin floors.

MATERIAL

LVT - ZERO CURVE is a profile that allows to connect LVT flooring to another one at a lower level, working as an expansion joint. The profile is composed by a BASE in rigid vinyl resin, with a width of 23 mm and by a TOP in aluminium with a visible surface of 26 mm. The BASE is punched and perforated to ensure its fixing with adhesive or screws. The TOP is available in anodized gold, silver and bronze aluminium and is very resistant to commonly used cleaning products. Its particular design and the big range of finishes make **LVT - ZERO CURVE** a much-sought after profile that can be used with any vinyl resin floors.

AREAS OF USE


LVT - ZERO CURVE in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

WARNINGS

Do not use **LVT - ZERO CURVE** in anodized aluminium in the swimming pool, outdoor and in environments where aggressive substances are used.

MAINTENANCE

LVT - ZERO CURVE does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

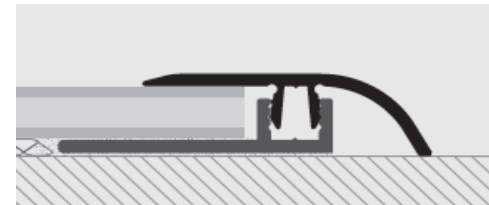

LAING INSTRUCTIONS

1. Choose "**LVT - ZERO CURVE**" in the desired finish.
2. Cut the rigid vinyl resin BASE at the desired length and fix it with adhesive or screws.
3. Lay the vinyl resin floors making sure to leave a 5 mm joint between the BASE and the floor.
4. Cut the aluminum TOP at the desired length.
5. Place a wooden board on the aluminium TOP and hammer evenly, favoring the insertion of the TOP into the BASE.

TEXT TEMPLATE FOR TENDERS

Supply and installation of profile that allows to connect two LVT flooring to another one at a lower level, working as an expansion joint. It is composed by a BASE in rigid vinyl resin and by a TOP in aluminium. The BASE, perforated and punched to ensure its fixing, has a width of 23 mm. The TOP in anodized gold / silver / bronze aluminium, has a visible surface of 26 mm, like LVT - ZERO CURVE of the company Progress Profiles.

PINZ... 2646: TOP in anodized aluminium

PINBFT 2346: BASE in rigid vinyl resin

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt