




## PROSCREW 44



PSWC... 44

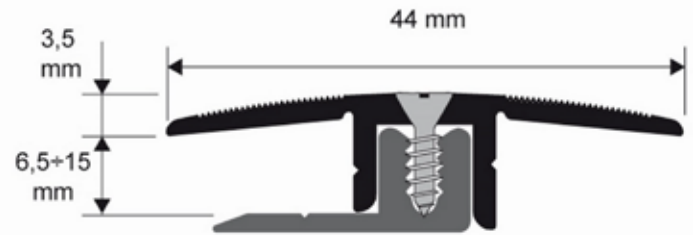

### DESCRIPTION

**PROSCREW 44** is an expansion joint for wooden and laminate floor. The profile is composed by an aluminium BASE and by an anodized aluminium TOP that should be screwed to the BASE. Its particular design and the big range of finishes, make it a much-sought after profile that can be used with any wooden and laminate floor.

### MATERIAL

**PROSCREW 44** is an expansion joint for wooden and laminate floor. The profile is composed by a BASE in natural aluminium, with a width of 22 mm and by a TOP in aluminium with a knurled visible surface of 44 mm. The BASE is perforated to ensure its fixing with screws. The TOP is available in anodized gold, silver, bronze, sand and champagne aluminium. The TOP is screwed to the BASE; for this reason the same profile is suitable for floors thicknesses from 6,5 to 15 mm. Its particular design and the big range of finishes make **PROSCREW 44** a much-sought after profile that can be used with any wooden and laminate floor.

### AREAS OF USE

**PROSCREW 44** in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

### WARNINGS



Do not use **PROSCREW 44** in anodized aluminium in the swimming pool, outdoor and in environments where aggressive substances are used.

### MAINTENANCE

**PROSCREW 44** does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

### LAYING INSTRUCTIONS

1. Choose "**PROSCREW 44**" in the desired finish.
2. Cut the aluminium BASE at the desired length and fix it with screws.
3. Lay the wooden floor or laminate making sure to leave a 5 mm joint between the BASE and the floor.
4. Cut the aluminium TOP at the desired length.
5. Place the profile over the "U" shaped channel of the BASE and screw it.

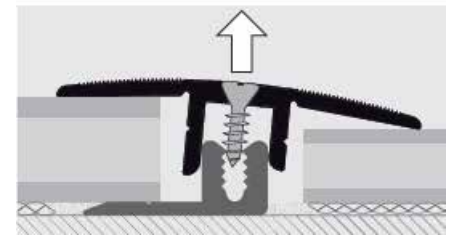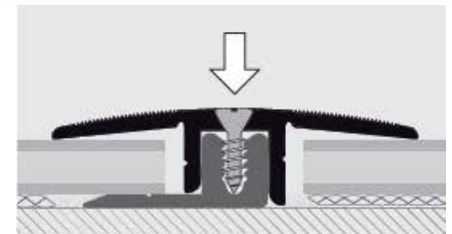

### TEXT TEMPLATE FOR TENDERS

Supply and installation of expansion joint for wooden and laminate floor. It is composed by a natural aluminium perforated BASE, with a width of 22 mm, to ensure its fixing with screws and by a TOP, with a visible knurled surface of 44 mm, in anodized gold / silver / bronze / sand / champagne aluminium, like PROSCREW 44 of the Progress Profiles company.

**PSW... 44** : Natural aluminium BASE and anodized aluminium TOP

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ €/mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt