




# PROSCREW 50

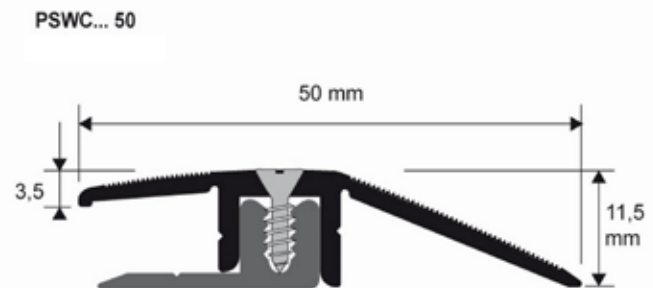

## DESCRIPTION

**PROSCREW 50** is a profile that allows to connect a wooden or laminate flooring to another one at a lower level, working as an expansion joint. The profile is composed by an aluminum BASE and by a TOP in anodized aluminum that should be screwed to the BASE. Its particular design and the big range of finishes, make it a much-sought after profile that can be used with any wooden and laminate floor.

## MATERIAL

**PROSCREW 50** is a profile that allows to connect a wooden or laminate flooring to another one at a lower level, working as an expansion joint. The profile is composed by a BASE in natural aluminum, with a width of 22 mm and by a TOP in aluminum with a knurled visible surface of 50 mm. The BASE is perforated to ensure its fixing with screws. The TOP is available in anodized gold, silver, bronze, sand and champagne aluminum. The TOP is screwed to the BASE. Its particular design and the big range of finishes make **PROSCREW 50** a much-sought after profile that can be used with any wooden and laminate floor.

## AREAS OF USE

**PROSCREW 50** in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

## WARNINGS


Do not use **PROSCREW 50** in anodized aluminium in the swimming pool, outdoor and in environments where aggressive substances are used.

## MAINTENANCE

**PROSCREW 50** does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "**PROSCREW 50**" in the desired finish.
2. Cut the aluminum BASE at the desired length and fix it with screws.
3. Lay the wooden floor or laminate making sure to leave a 5 mm joint between the BASE and the floor.
4. Cut the aluminum TOP at the desired length.
5. Place the TOP over the "U" shaped channel of the BASE and screw it.

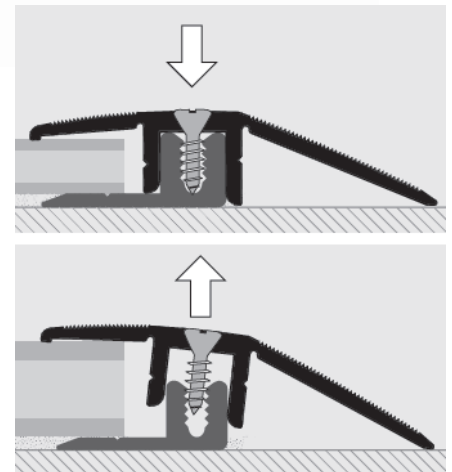

## TEXT TEMPLATE FOR TENDERS

Supply and installation of profile that allows to connect a wooden / laminate flooring to another one at a lower level, working as an expansion joint. It is composed by a natural aluminum perforated BASE, with a width of 22 mm, to ensure its fixing with screws and by a TOP, with a visible knurled surface of 50 mm, in anodized gold / silver / bronze / sand / champagne aluminum, like PROSCREW 50 of the Progress Profiles company.

**PSW... 50**: BASE in natural aluminum and TOP in anodized aluminum.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt