



# PROWALK 2510 & 2520



## DESCRIPTION

**PROWALK** are non-slip profiles in aluminium for stairs, equipped with a knurled surface. Their particular section and the availability in three finishes make them elegant and valued profiles also in case of modern stairs.

## MATERIAL

**PROWALK 2510 & 2520** are non - slip profiles for stairs in anodized silver, gold and bronze aluminium, equipped with a knurled surface. The profiles have a knurled horizontal visible surface of 25 mm and a vertical smooth one of 10 and 20 mm. They are available with adhesive and punched. The punched version can be fix with screws. Their particular section and the availability in three finishes make **PROWALK 2510 & 2520** elegant and valued profiles also in case of modern stairs.

## AREAS OF USE

**PROWALK 2510 & 2520** in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.



## WARNINGS

Do not use **PROWALK 2510 & 2520** in anodized aluminium in the swimming pool, outdoor and in environments where aggressive substances are present.

## MAINTENANCE

**PROWALK 2510 & 2520** do not require any special maintenance. It is recommended to clean them with normal household cleaning products.

## LAYING INSTRUCTIONS



1. Choose "**PROWALK 2510 & 2520**" according to the desired finish and vertical visible surface.
2. Cut "**PROWALK 2510 & 2520**" to the desired length.

### With Adhesive

3. Remove all remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is dry, remove the protective film.
5. Correctly position the profile and press it without hitting.

### Punched

3. Align the profile and mark the position of the holes on the support.
4. Drill the support with a 5 mm diameter bit and insert the 5 x 25 mm. rawlplugs.
5. Align the profile to the holes and screw it.

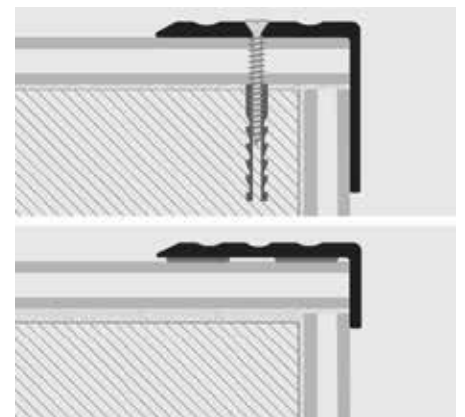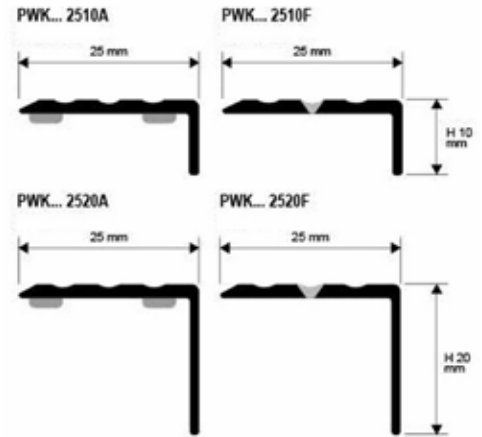

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of a non - slip profile in anodized silver / gold / bronze aluminium for stairs. The punched profiles / the profiles with adhesive have a horizontal knurled visible surface of 25 mm and a vertical smooth one of 10 / 20 mm, like PROWALK 2510 & 2520 of the Progress Profiles company.

**PWK... 2510A / 2510F / 2520A / 2520F / 25109AS / 25109FS / 251013FS:** Anodized gold, silver and bronze aluminium.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt