




PROLISTEL ACC is a range of decorative profiles/strips that are ideal for easily creating chromatic effects on ceramic tile/marble/mosaic coverings or, in the stainless steel AISI 316L/1.4301-V4A range, for creating separations and decorations between floors in the same or differing material. Thanks to their design, shape and thickness of 4.5 and 10 mm - 3/16" and 3/8", may be laid using the same adhesive to create horizontal and vertical lines, on the wall or on the floor, irrespective of the thickness of the covering. Various finishes and widths available in stainless steel AISI 04/1.4301-V2A, polished and satin. Match with the same basic colours in the PROJOLLY, PROTERMINAL and PROJOLLY SQUARE and the new PROKERLAM SQUARE-LINE-JOLLY range.

PROLISTEL ACC

POLISHED STAINLESS STEEL
AISI 316/1.4404 - V4A

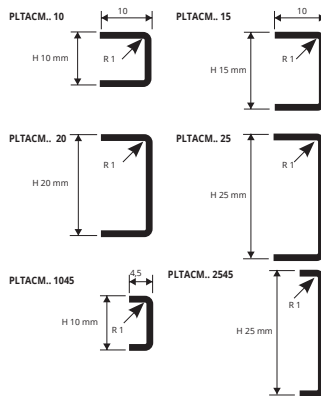

POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A
with protective film - bar length 2,7 lm
pack 40 Pcs - 108 lm - 8/10mm


Article	HxL mm		
PLTACM 10	10 X 10		
PLTACM 1045	10 X 4,5		
PLTACM 15	15 X 10		
PLTACM 20	20 X 10		
PLTACM 25	25 X 10		
PLTACM 2545	25 X 4,5		

POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A - INTERNAL USE
with protective film - bar length 2,7 lm
pack 40 Pcs - 108 lm - 8/10mm

Article	HxL mm		
PLTACMI 10	10 X 10		
PLTACMI 1045	10 X 4,5		
PLTACMI 15	15 X 10		
PLTACMI 20	20 X 10		
PLTACMI 25	25 X 10		
PLTACMI 2545	25 X 4,5		

PRODUCTION ON DEMAND. DELIVERY TIME TO BE AGREED.
(PLTACMI minimum quantity order of 270 lm).

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

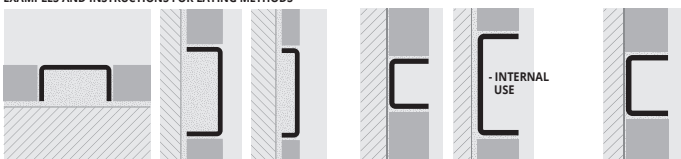

1. Choose the PROLISTEL in the required width. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing it into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids. Pay attention to the external edges of the PROLISTEL. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

COLOURS

