


PROSHELL

POLISHED AND SATIN FINISH
STAINLESS STEEL AISI 304/1.4301-V2A

internal seal hygienic profiles

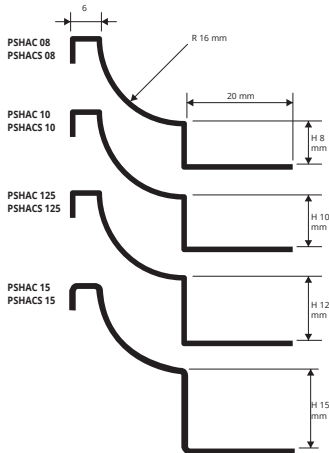

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - pack 20 Pcs - 54 lm


Article	H mm		
PSHAC 08	8		
PSHAC 10	10		
PSHAC 125	12,5		
PSHAC 15	15		

SATINED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H mm		
PSHACS 08	8		
PSHACS 10	10		
PSHACS 125	12,5		
PSHACS 15	15		

Suitable for use in contact with foodstuffs.

EXAMPLES AND INSTRUCTIONS FOR LAYING



1. Choose "PROSHELL" according to the tile thickness and desired finish.
2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL" into the adhesive.
4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS




PREWELDED CORNER, CAPS and THREE-WAYS JOINTS


POLISHED AND SATINED STAINLESS STEEL

INTERNAL CORNER


EXTERNAL CORNER



THREE WAYS JOINTS



JOINT GISHN



PREWELDED CORNER - POLISHED STAINLESS STEEL
H 08 - 10 - 12,5 - 15 mm - pack 10 Pcs


Article	Lmm		
RPI 8-10-125 (internal)	100		
RPI 15 (internal)	100		
RPE 8-10-125 (external)	100		
RPE 15 (external)	100		
RPT 8-10-125 (three-ways)	100		
RPT 15 (three-ways)	100		

Specify height of joint: E.g.: RPI 8 for H 8 mm.

PREWELDED CORNER - SATINED STAINLESS STEEL
H 08 - 10 - 12,5 - 15 mm - pack 10 Pcs

Article	Lmm		
RPIS 8-10-125 (internal)	100		
RPIS 15 (internal)	100		
RPES 8-10-125 (external)	100		
RPES 15 (external)	100		
RPTS 8-10-125 (three-ways)	100		
RPTS 15 (three-ways)	100		

Specify height of joint: E.g.: RPIS 8 for H 8 mm.



PROTERMIAL
PROJOLLY SQUARE AND
PROJOLLY QUART
(NO PROJOLLY)



To facilitate and complete the application of PROSHELL (PSH-) (in AISI 304-1.4301 stainless steel), joints and right (R) and left (L) caps are available to close the profile ends and provide a connection with ceramic tiles, brickwork, wooden floors, etc. The caps are made of painted plastic with: in the bright stainless steel effect and satin stainless steel effect.

CAPS AND JOINTS IN RIGID GREY PLASTIC
pack 10 Pcs

Article		
TPSHAC caps R-L (poli. stainless steel effect)	(5 pairs)	
TPSHACS caps R-L (satin stainless steel effect)	(5 pairs)	
GISHN 08		
GISHN 10		
GISHN 125		
GISHN 15		

END CAP
TPSHAC/ACS

