



# PROBORD



**DESCRIPTION**

**PROBORD** is a round corner bead profile that can be applied on external corners of coverings. Its particular section and variety of heights and finishes make it a very sturdy profile suitable for every kind of environment.

## MATERIAL

**PROBORD** is a round corner bead profile in polished and satin finish stainless steel AISI 304 / 1.4301 - V2A. It is available in the height of 8 - 10 and 12,5 mm with a visible surface of 25 x 25 mm. It has a punched flange that guarantees a perfect grip to the adhesive. The two finishes combined with the three different heights, make **PROBORD** an elegant and much sought after profile.

## AREAS OF USE

**PROBORD** in stainless steel AISI 304/1.4301 – V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required. The profile is suitable for food contact after cleaning and removing any surface residue.



**WARNINGS**

Do not use **PROBORD** in stainless steel AISI 304/1.4301 – V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommended to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.


## MAINTENANCE

**PROBORD** does not require any special maintenance. It is suggested to clean them with normal household cleaning products.


## LAYING INSTRUCTIONS

1. Choose "**PROBORD**" according to the flooring thickness and in the desired finish.
2. Cut "**PROBORD**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "**PROBORD**" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PEBDAC/ACS 08

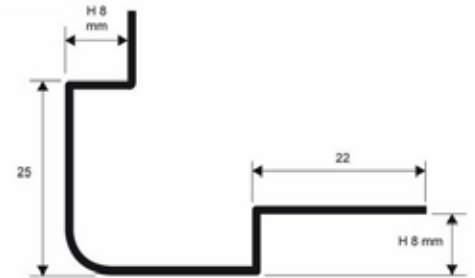

PEBDAC/ACS 10

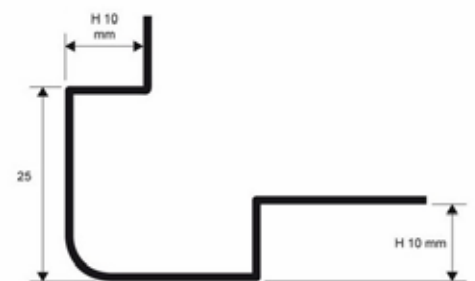

PEBDAC/ACS 125

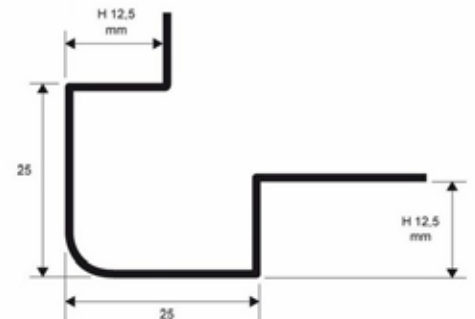

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of round corner bead profile in polished / satin finish stainless steel AISI 304 / 1.4301 - V2A. With height of 8 / 10 / 12,5 mm and visible surface of 25 x 25 mm. Equipped with a punched flange that guarantees a perfect grip to the adhesive, like **PROBORD** of the Progress Profiles company.

**PEBDAC/ACS...08/10/125:** Polished and satin finish stainless steel.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total : \_\_\_\_\_ €/mt