



PROEDGE FLEX



DESCRIPTION

PROEDGE FLEX is a corner bead profile in co-extruded vinyl resin that can be applied on external corners after the tiles laying. Its particular section makes it a sturdy profile suitable for a lot of environments.

MATERIAL

PROEDGE FLEX is a corner bead profile in shockproof non - toxic co - extruded vinyl resin with a visible surface of 40 x 40 mm. It can be applied on external corners after the tiles laying. The profile is composed of an internal structure in rigid vinyl resin and an external one made up of five half circles in soft vinyl resin. It is available without and with adhesive. Its good resistance and the availability in five colours, make **PROEDGE FLEX** suitable for a lot of environments.

AREAS OF USE

PROEDGE FLEX in shockproof non - toxic co-extruded vinyl resin is suitable to be used for indoor walls.



WARNINGS

Do not use **PROEDGE FLEX** in shockproof non - toxic co-extruded vinyl resin outdoors. Do not clean it with substances that contain acetone and ethyl - butyl acetate (solvents).


MAINTENANCE

PROEDGE FLEX does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROEDGE FLEX**" according to the desired colour.
2. Cut "**PROEDGE FLEX**" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, apply silicone (in case of self-adhesive profile, remove the protective film).
5. Press the profile evenly until it is completely adherent to the wall.

PFC... 40/40A

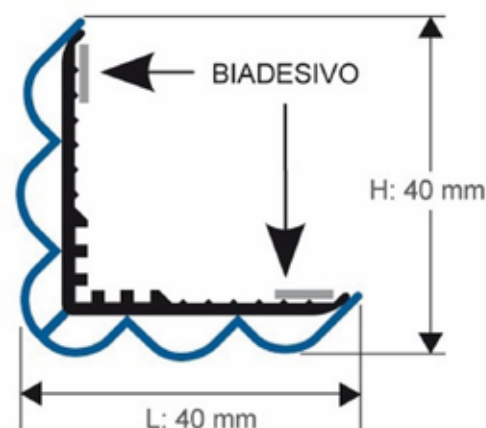

TEXT TEMPLATE FOR TENDERS

Delivery and installation of corner bead profile in shockproof non - toxic co - extruded vinyl resin with adhesive / without adhesive, with a visible surface of 40 x 40 mm. The profile is composed of an internal structure in rigid vinyl resin and an external one made up of five half circles in soft vinyl resin, like **PROEDGE FLEX** of the Progress Profiles company.

PFC... 40 / PFC... 40A: Shockproof non - toxic co - extruded vinyl resin with and without adhesive

Profile width : _____ mm
Profile length : _____ mt
Material : _____ €/mt
Application : _____ €/mt
Total value : _____ €/mt