

# PROJOLLY QUART



## DESCRIPTION

**PROJOLLY QUART** is a quarter-circle rounded bead profile that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and variety of heights and finishes, make **PROJOLLY QUART** an elegant and much sought after profile.

## MATERIAL

**PROJOLLY QUART** is a quarter-circle rounded bead profile in polished, super polished and satin finish stainless steel AISI 304 / 1.4301 – V2A. It is available in the heights of 4.5 – 6 – 8 – 10 – 11 and 12.5 mm. It has a punched flange that guarantees a perfect grip to the adhesive. The high range of finishes, combined with the availability of different heights and special pieces such as, internal and external capsules, end caps and junctions, make **PROJOLLY QUART** an elegant and much sought after profile.

## AREAS OF USE

**PROJOLLY QUART** in stainless steel AISI 304/1.4301 – V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required. The profile is suitable for food contact after cleaning and removing any surface residue.



## WARNINGS



Do not use **PROJOLLY QUART** in stainless steel AISI 304/1.4301 – V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommend to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

## MAINTENANCE

**PROJOLLY QUART** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "**PROJOLLY QUART**" according to the tile thickness and desired finish.
2. Cut "**PROJOLLY QUART**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "**PROJOLLY QUART**" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

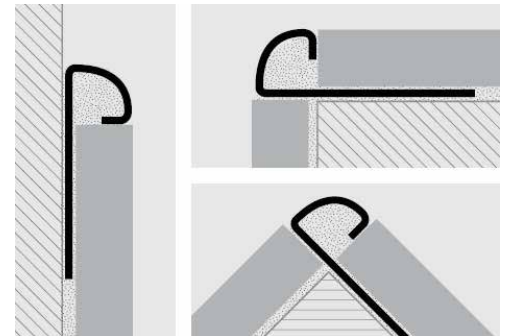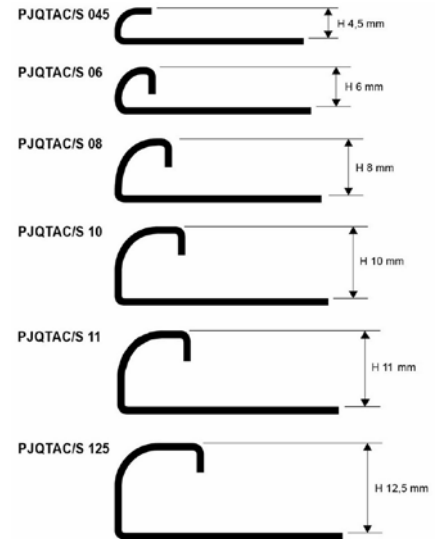

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of a quarter-circle rounded bead profile in polished / super polished / satin finish stainless steel AISI 304 / 1.4301 – V2A. With a height of ..... mm and equipped with a punched flange that guarantees a perfect grip to the adhesive, like PROJOLLY QUART of the Progress Profiles company.

**PJQTAC/S/ML 045 / 06 / 08 / 10 / 11 / 125:** Polished, super polished and satin finish stainless steel INOX AISI 304/1.4301-V2A

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt