



PROJOLLY QUART



DESCRIPTION

PROJOLLY QUART is a quarter-circle rounded bead profile that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and variety of heights and finishes, make **PROJOLLY QUART** an elegant and much sought after profile.

MATERIAL

PROJOLLY QUART is a quarter-circle rounded bead profile in anodized silver, gold and titanium aluminum, polished chrome, gold and titanium aluminum and brushed silver aluminium available in the heights of 6 - 8 - 10 - 11 - 12.5 and 15 mm. It has a punched flange that guarantees a perfect grip to the adhesive. The high range of finishes, combined with the availability of different heights and special pieces such as, internal and external corners, end caps and junctions, make **PROJOLLY QUART** an elegant and much sought after profile.

AREAS OF USE

PROJOLLY QUART in anodized, polished and brushed aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.



WARNINGS



Do not use **PROJOLLY QUART** in anodized, polished and brushed aluminium outdoors and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

MAINTENANCE

PROJOLLY QUART does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROJOLLY QUART**" according to the tile thickness and desired finish.
2. Cut "**PROJOLLY QUART**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "**PROJOLLY QUART**" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

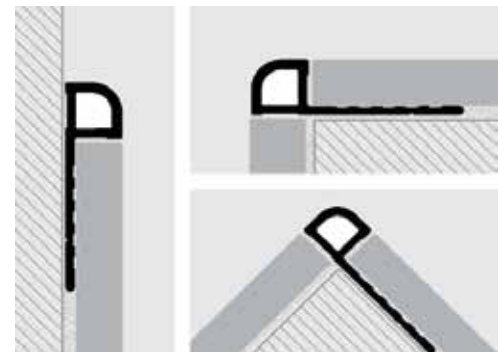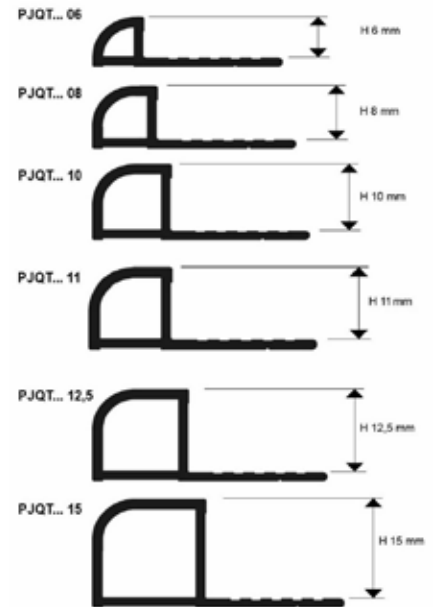

TEXT TEMPLATE FOR TENDERS

Delivery and installation of quarter-circle rounded bead profile in anodized silver - gold - titanium aluminum / polished chrome - gold - titanium aluminum / brushed silver aluminium. With a height of mm and equipped with a punched flange that guarantees a perfect grip to the adhesive, like PROJOLLY QUART of the Progress Profiles company.

PJQ... 06 / 08 / 10 / 11 / 125 / 15 : Anodized silver, gold and titanium aluminum, polished chrome, gold and titanium aluminum and brushed silver aluminium.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt