



# PROJOLLY QUART



**DESCRIPTION**

**PROJOLLY QUART** is a quarter-circle rounded bead profile that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and variety of available heights, make **PROJOLLY QUART** an elegant and much sought after profile.

**MATERIAL**

**PROJOLLY QUART** is a quarter-circle rounded bead profile in powder coated aluminum with stone effect available in the heights of 6 - 8 - 10 - 11 and 12.5 mm. It has a punched flange that guarantees a perfect grip to the adhesive. The high range of colours, combined with the availability of different heights and special pieces such as, internal and external corners, end caps and junctions, make **PROJOLLY QUART** an elegant and much sought after profile.

**AREAS OF USE**

**PROJOLLY QUART** in powder coated aluminum is suitable to be used for every walls.

**WARNINGS**

Do not use **PROJOLLY QUART** in powder coated aluminum in swimming pool and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying.





**MAINTENANCE**

**PROJOLLY QUART** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

**LAYING INSTRUCTIONS**

1. Choose "**PROJOLLY QUART**" according to the tile thickness and desired colour.
2. Cut "**PROJOLLY QUART**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "**PROJOLLY QUART**" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

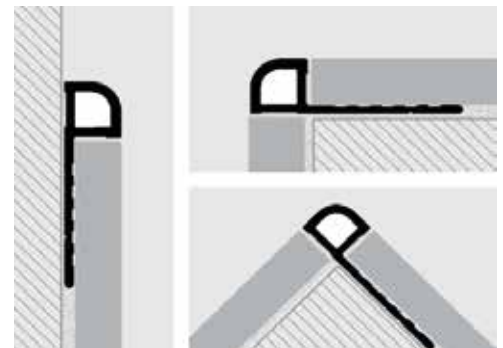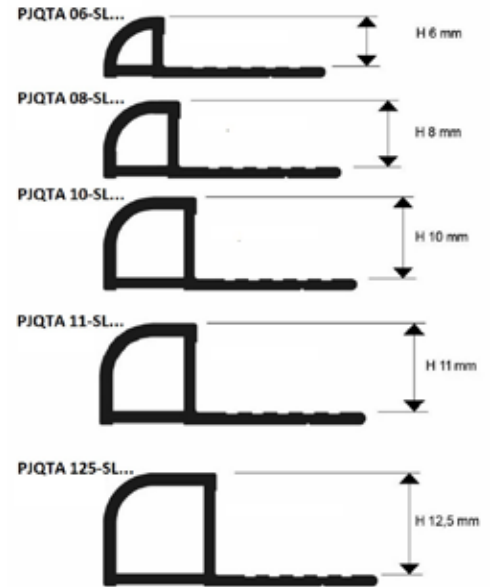

**TEXT TEMPLATE FOR TENDERS**

Delivery and installation of is a quarter-circle rounded bead profile in powder coated aluminum in ..... colour. With a height of ..... mm and equipped with a punched flange that guarantees a perfect grip to the adhesive, like PROJOLLY QUART of the Progress Profiles company.

**PJQTA 6 / 08 / 10 / 11 / 125-...** : Powder coated aluminium.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt