



## PROLISTEL P ALL



**DESCRIPTION**

**PROLISTEL P ALL** is an aluminium listel suitable to decorate wall and floor coverings in ceramic, mosaic and natural stone. Its particular section and the availability in nineteen different finishes and two widths, make it a much sought after profile.

### MATERIAL

**PROLISTEL P ALL** is a "C" shaped listel in anodized silver - copper - titanium and black aluminium, polished chrome - copper - titanium and black aluminium, brushed silver - copper - titanium and black aluminium and Tiltex brushed silver - copper and titanium aluminium with a visible surface of 10 and 25 mm and height of 7 mm.

Its particular section and the availability in nineteen different finishes and two widths, make **PROLISTEL P ALL** a much sought after profile that can be matched with **PROJOLLY**, **PROJOLLY SQUARE**, **PROJOLLY TRIANGLE** and **PROJOLLY QUART**.

### AREAS OF USE

**PROLISTEL P ALL** in anodized, polished and brushed aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.



**WARNINGS**




Do not use **PROLISTEL P ALL** in anodized, polished and brushed aluminium outdoors and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

### MAINTENANCE

**PROLISTEL P ALL** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

### LAYING INSTRUCTIONS

1. Choose "**PROLISTEL P ALL**" according to the visible surface and desired finish.
2. Cut "**PROLISTEL P ALL**" to the desired length and apply the adhesive on the surface where the profile will be laid.
3. Press "**PROLISTEL P ALL**" into the adhesive, aligning it with the tiles leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

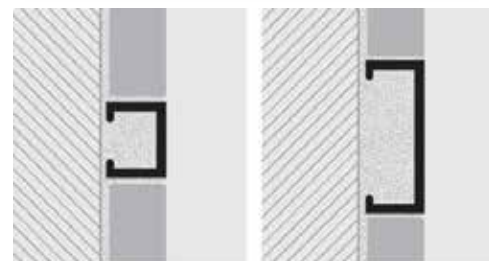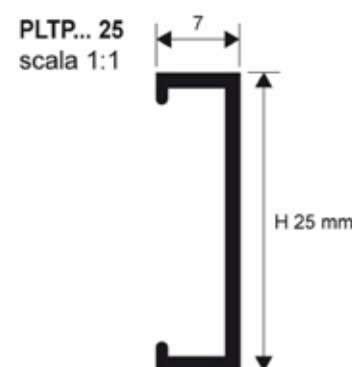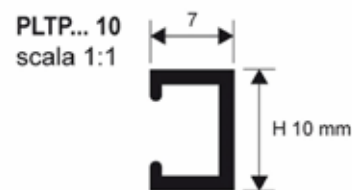

### TEXT TEMPLATE FOR TENDERS

Delivery and installation of a "C" shaped listel in anodized silver - copper - titanium - black aluminium / polished chrome - copper - titanium - black aluminium / brushed silver - copper - titanium - black aluminium / Tiltex brushed silver - copper - titanium aluminium with a visible surface of 10 / 25 mm and height of 7 mm, like **PROLISTEL P ALL** of the Progress Profiles company.

**PLTP... 10 / 25:** Anodized, polished, brushed and Tiltex brushed aluminium.

Profile width : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt