

PROTECT T is a profile designed to protect edges and angles of low thickness (3/4.5 mm) coverings. It prevents chipping panel, door, and kitchen countertop edges with thin L-shaped profiles.

PROTECT T

ANODISED SILVER and CHROMED POLISHED ALUMINIUM




ANODISED SILVER and CHROMED POLISHED ALUMINIUM
bar length 2,7 LM - pack. 20 Pcs - 54 LM

| Article | L mm | | |
|----------|------|--|--|
| PTTAA 22 | 22 | | |
| PTTBC 22 | 22 | | |
| PTTAA 91 | 91 | | |
| PTTBC 91 | 91 | | |


INSTRUCTIONS FOR LAYING METHODS

1: Choose the PROTECT T of the required type and colour. 2: Drill and fasten it to the panel and/or substrate by means of screws. 3: Spread glue in the area where the covering will be laid. 4: Cut the covering and lay it in such a way that the upper part of the profile closes flush. 5: Fill the contact area between the profile and tile with sealant to prevent water from collecting into the empty spaces.

PTT... 22




PTT... 91

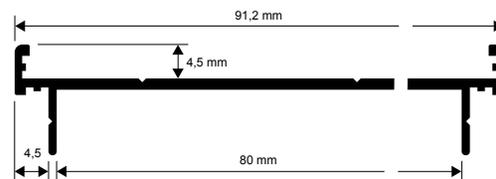


profiles for top

EXEMPLES OF LAYING

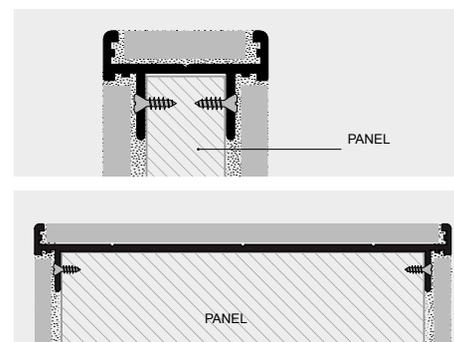

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



AVAILABLE ALSO IN THE OTHER FINISHINGS OF ALUMINIUM
(minimum quantity order of 500 LM)

PROTECT Q is a profile designed to protect edges and angles of low thickness (3/4.5 mm) coverings. It prevents chipping panel, door, and kitchen countertop edges with squared profiles.

PROTECT Q

ANODISED SILVER and CHROMED POLISHED ALUMINIUM




ANODISED SILVER and CHROMED POLISHED ALUMINIUM
bar length 2,7 LM - pack. 20 Pcs - 54 LM

| Article | L mm | | |
|----------|------|--|--|
| PTQAA 22 | 22 | | |
| PTQBC 22 | 22 | | |
| PTQAA 91 | 91 | | |
| PTQBC 91 | 91 | | |


INSTRUCTIONS FOR LAYING METHODS

1: Choose the PROTECT Q of the required type and colour. 2: Drill and fasten it to the panel and/or substrate by means of screws. 3: Spread glue in the area where the covering will be laid. 4: Cut the covering and lay it in such a way that the upper part of the profile closes flush. 5: Fill the contact area between the profile and tile with sealant to prevent water from collecting into the empty spaces.


PTQ... 22



PTQ... 91

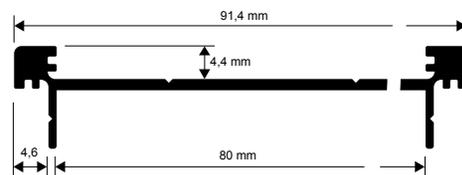


EXEMPLES OF LAYING

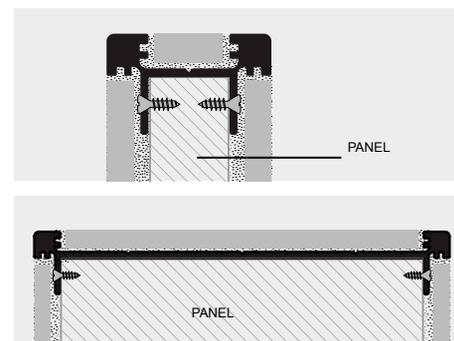

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



AVAILABLE ALSO IN THE OTHER FINISHINGS OF ALUMINIUM
(minimum quantity order of 500 LM)