



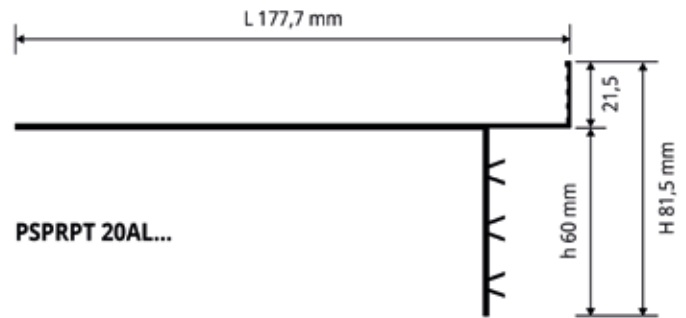

PROSUPPORT PROFILE T

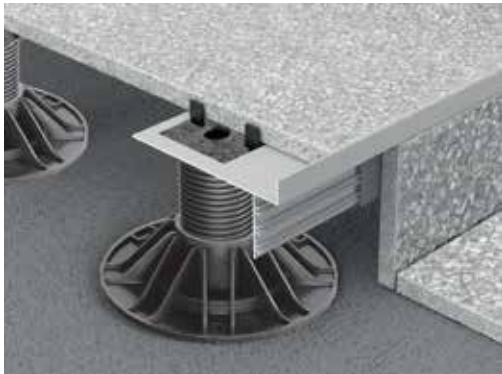

DESCRIPTION

PROSUPPORT PROFILE T is a perimeter profile in aluminium designed to protect and to complete the edges of raised flooring in ceramic, wood and composite materials. Thanks to its ease of application it is a much sought-after profile.

MATERIAL

PROSUPPORT PROFILE T is a perimeter profile in natural aluminium designed to protect and to complete the edges of raised flooring in ceramic, wood and composite materials. The profile is equipped with a punched flange, with a width of 177,7 mm, that ensures its fixing to the heads of **PROSUPPORT SYSTEM**. The vertical side of the profile, with a height of 81,5 mm, protects the tile edges and is equipped with three dovetail cavities that guarantee the anchoring of the adhesive. Thanks to its ease of application **PROSUPPORT PROFILE T** is a much sought after profile for every raised flooring.

AREAS OF USE

PROSUPPORT PROFILE T in aluminium is an edging profile for every raised flooring.

WARNINGS

Do not use **PROSUPPORT PROFILE T** in aluminium in swimming pool and like edging profile for terraces and balconies.

MAINTENANCE

PROSUPPORT PROFILE T does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Cut "**PROSUPPORT PROFILE T**" to the desired length.
2. Cut the bases of **PROSUPPORT SYSTEM** to ensure the laying of the edging tiles.
3. Lay "**PROSUPPORT PROFILE T**" on the heads of **ProSupport SYSTEM**.
4. Lay the tiles on the flange of "**PROSUPPORT PROFILE T**".
5. With a cement base adhesive fill the dovetails of "**PROSUPPORT PROFILE T**", apply the adhesive on the edging tiles and press until they are aligned with the profile.



TEXT TEMPLATE FOR TENDERS

Delivery and installation of perimeter profile in natural aluminium designed to protect and to complete the edges of raised flooring in ceramic / wood / composite materials. The profile is equipped with a punched flange, with a width of 177,7 mm, that ensures its fixing to the heads of **PROSUPPORT SYSTEM**. The vertical side of the profile, with a height of 81,5 mm, protects the tile edges and is equipped with three dovetail cavities that guarantee the anchoring of the adhesive, like **PROSUPPORT PROFILE T** of the Progress Profiles company.

PSPRPT 20AL: Varnished aluminium

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt