

# PROSUPPORT TUBE SYSTEM

ADJUSTABLE AND MODULAR SUPPORTS SYSTEM FOR OUTDOOR FLOATING FLOORS

PROSUPPORT TUBE SYSTEM is an adjustable and modular supports system for outdoor floating floors from the height of 29 mm to 1000 mm. The system is composed of 1 base, 2 screws, 1 flange, 2 heads and several pvc pipes to obtain the requested height. Both heads, according to the screw, can be fix or self-levelling.










**PATENTED**

## PROSUPPORT TUBE SYSTEM KIT HEIGHTS

FULL KIT - Pack. 40 Pcs. - Items not for sale individually. Minimum order one pack.

A: SUPPORT'S HEIGHT WITH SELF-LEVELLING INSTALLATION  
B: SUPPORT'S HEIGHT WITH FIX SIDE INSTALLATION  
T: THICKNESS OF THE SPACER FLAP



 <p>T: 4 / 2 mm A: 34 / 54 mm B: 29 / 49 mm</p> <p><b>FULL KIT CODE</b> PST3454/4 T = 4 mm    PST3454/2 T = 2 mm</p> <p>€/Pc. €/Pack.</p>	 <p>T: 4 / 2 mm A: 54 / 74 mm B: 49 / 69 mm</p> <p><b>FULL KIT CODE</b> PST5474/4 T = 4 mm    PST5474/2 T = 2 mm</p> <p>€/Pc. €/Pack.</p>	 <p>T: 4 / 2 mm A: 74 / 94 mm B: 69 / 89 mm</p> <p><b>FULL KIT CODE</b> PST7494/4 T = 4 mm    PST7494/2 T = 2 mm</p> <p>€/Pc. €/Pack.</p>	 <p>T: 4 / 2 mm A: 94 / 114 mm B: 89 / 109 mm</p> <p><b>FULL KIT CODE</b> PST94114/4 T = 4 mm    PST94114/2 T = 2 mm</p> <p>€/Pc. €/Pack.</p>	
 <p>T: 4 / 2 mm A: 114 / 134 mm B: 109 / 129 mm</p> <p><b>FULL KIT CODE</b> PST114134/4 T = 4 mm    PST114134/2 T = 2 mm</p> <p>€/Pc. €/Pack.</p>	 <p>T: 4 / 2 mm A: 134 / 154 mm B: 129 / 149 mm</p> <p><b>FULL KIT CODE</b> PST134154/4 T = 4 mm    PST134154/2 T = 2 mm</p> <p>€/Pc. €/Pack.</p>	 <p>T: 4 / 2 mm A: 154 / 174 mm B: 149 / 169 mm</p> <p><b>FULL KIT CODE</b> PST154174/4 T = 4 mm    PST154174/2 T = 2 mm</p> <p>€/Pc. €/Pack.</p>	 <p>T: 4 / 2 mm A: 174 / 194 mm B: 169 / 189 mm</p> <p><b>FULL KIT CODE</b> PST174194/4 T = 4 mm    PST174194/2 T = 2 mm</p> <p>€/Pc. €/Pack.</p>	 <p>T: 4 / 2 mm A: 194 / 214 mm B: 189 / 209 mm</p> <p><b>FULL KIT CODE</b> PST194214/4 T = 4 mm    PST194214/2 T = 2 mm</p> <p>€/Pc. €/Pack.</p>

### HEIGHTS GREATER THAN 209 mm

H (mm) SELF-LEVELLING HEAD (A)	H (mm) FIX HEAD (B)	Choose the kit according to the desired tile joint (T)		PIPE	FLANGE
		PST3454/4 T = 4 mm	PST3454/2 T = 2 mm		PSTGH 02
214/234	209/229			+ PSTT 175	
234/254	229/249			+ PSTT 195	
254/274	249/269			+ PSTT 215	
274/294	269/289			+ PSTT 235	
294/314	289/309			+ PSTT 255	
314/334	309/329			+ PSTT 275	
334/354	329/349			+ PSTT 295	
354/374	349/369			+ PSTT 315	
374/394	369/389			+ PSTT 335	
394/414	389/409			+ PSTT 355	
414/434	409/429			+ PSTT 375	
434/454	429/449			+ PSTT 395	
454/474	449/469			+ PSTT 415	
474/494	469/489			+ PSTT 435	
494/514	489/509			+ PSTT 455	




## SELF-LEVELLING HEAD MODE

Self-levelling head mode  
Max height 1000 mm with max slope of 5%.

## FIXED HEAD MODE

Fixed head mode  
Max height 1000 mm

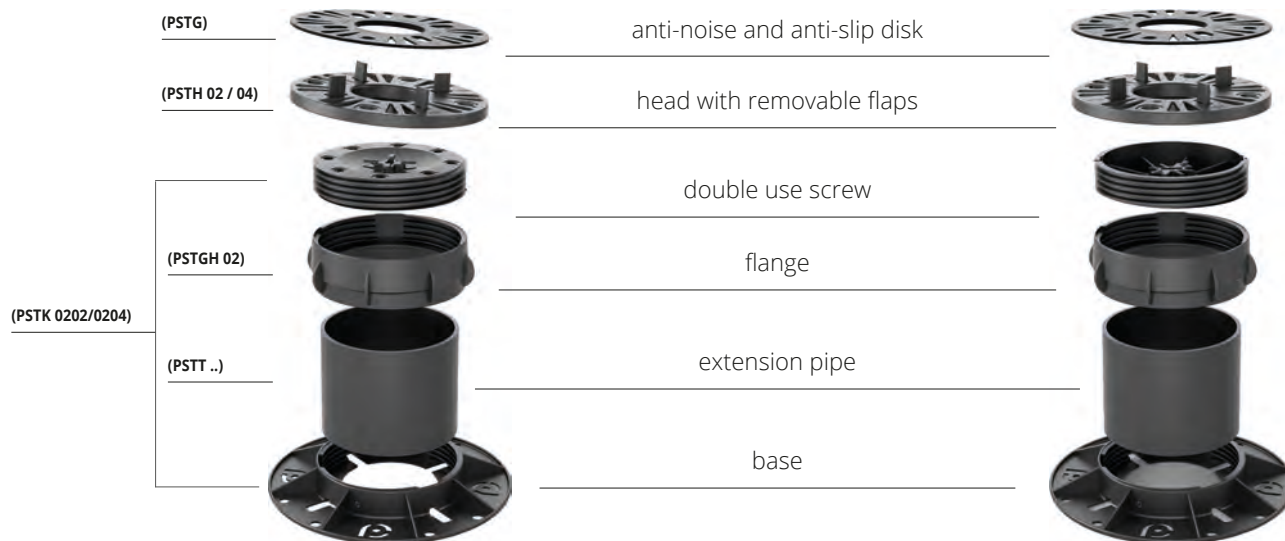


## PROSUPPORT TUBE SYSTEM COMPONENTS

BASE + SCREW 20/40 mm  
polypropylene - pack. 40 Pcs. (PSTK 0202) - pack. 20 Pcs. (PSTK 0204)

Article	Thickness (mm)	kit / pack.
PSTK 0202	20	40
PSTK 0204	40	20

Items not for sale individually. Minimum order one pack.



PSTK 0202

BASE + SCREW 20 mm



PSTK 0204

BASE + SCREW 40 mm


HEAD with removable flaps 2/4 mm  
polypropylene - pack. 40 Pcs.

Article	flap Thk (mm)	kit/pack.
PSTH 02	2	40
PSTH 04	4	40


Items not for sale individually. Minimum order one pack.



PSTH 02 / PSTH 04



FLAP THICKNESS 2 mm - PSTH 02



FLAP THICKNESS 4 mm - PSTH 04

FLANGE 40 mm  
polypropylene - pack. 40 pcs

Article	H (mm)	Pc/pack.
PSTGH 02	40	40

Connection nut with a lower side of 110 mm inner diameter, where the pipe of different heights should be inserted, and one side with thread where the regulation screws should be inserted.  
Items not for sale individually. Minimum order one pack.



PSTGH 02

ANTI-NOISE AND ANTI-SLIP DISK  
rubber - H 1,5 mm - Ø 150 - pack. 120 pcs

Article	H / Ø mm	Pc/pack.
PSTG	H 1,5 - Ø150	120

The non-slip rubber disk to be used with the heads of PROSUPPORT TUBE SYSTEM reduces noises till 25 dB.  
Items not for sale individually. Minimum order one pack.



PSTG

PRE-CUT EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene polypropylene - pack. 40 Pcs.

Article	H (mm)	Pc/pack.
PSTT 35	35	40
PSTT 55	55	40
PSTT 75	75	40
PSTT 95	95	40
PSTT 115	115	40
PSTT 135	135	40
PSTT 155	155	40

Items not for sale individually. Minimum order one pack.



PSTT...

FULL LENGTH EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene or polypropylene - pallet 43 Pcs.

Article	H (ml)	ml/pallet.
PSTT 2700	2,7	116

Items not for sale individually. Minimum order one pallet.

UPON REQUEST IT IS POSSIBLE TO HAVE HEIGHTS TILL 1000 MM USING PIPES FROM 155 TILL 955. For information and installation instructions ask for the technical data sheet. Price to be agreed. Production delay 4/5 weeks.

PSTT 2700



270 cm