



PROSTYLE



DESCRIPTION

PROSTYLE is a profile in aluminium for stairs designed to decorate the joint between the tread and the step rise. Its particular rounded geometry makes it an elegant and valued profile also in case of modern stairs.

MATERIAL

PROSTYLE is a decorative profile in anodized silver and gold aluminium for stairs. It is equipped with a punched flange that guarantees a perfect adhesion with the adhesive. The profile, with a rounded shape, has a horizontal visible surface of 24 mm and a vertical one of 14 mm. It is available in the heights of 8 - 10 and 12.5 mm. The rounded section ends in contact with the stair tread, while the vertical one rests on the step rise. Its particular geometry and the availability of special pieces as external corner and end caps, make **PROSTYLE** a much-sought after and easy to lay profile.

AREAS OF USE

PROSTYLE in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

WARNINGS

Do not use **PROSTYLE** in anodized aluminium outdoors and in environ-


ments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

MAINTENANCE

PROSTYLE does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROSTYLE**" according to the thickness of the flooring and in the desired finish.
2. Lay the tiles on the step rise and apply the adhesive on the area of the step tread, where the profile will be laid.
3. Lay the profile on the step tread, resting it on the tiles of the rise.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

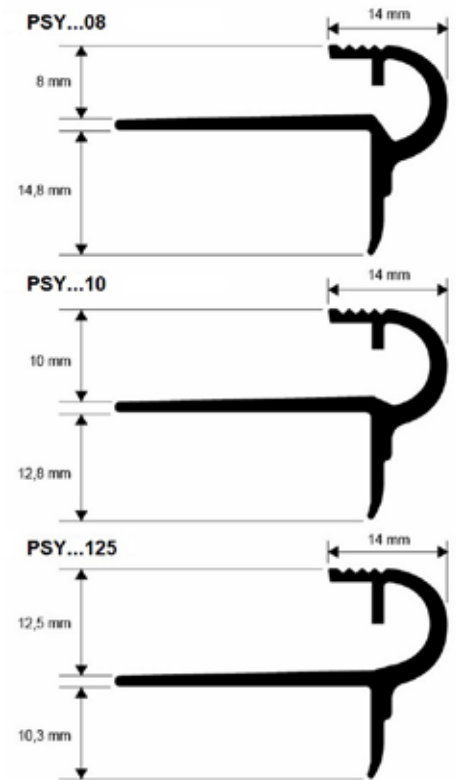

TEXT TEMPLATE FOR TENDERS

Delivery and installation of decorative profile in anodized silver / gold aluminium for stairs. It is equipped with a punched flange that guarantees a perfect adhesion with the adhesive. The profile, with a rounded shape, has a horizontal visible surface of 24 mm, a vertical one of 14 mm and a height of 8 / 10 / 12.5 mm. The rounded section ends in contact with the stair tread, while the vertical one rests on the step rise. The profile is equipped with special pieces as external corner and end caps, like **PROSTYLE** of the Progress Profiles company.

PSY... 08/10/125 : Anodised silver aluminium and anodized gold aluminium.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt