

PROTOP T



DESCRIPTION

PROTOP T is a profile for kitchens that can be applied along the edges of the top covered with tiles. Its particular section and the variety of finishes, make it an elegant and much sought after profile.

MATERIAL

PROTOP T is a profile for kitchens in anodized silver aluminium and polished chrome aluminium. The profile, with a height of 10 and 12.5 mm, protects and decorates the edges of the top covered with tiles. Equipped with a punched flange that ensures a perfect grip to the adhesive and a vertical part with a height of 51 and 53.5 mm. The availability in two finishes, two heights and of special pieces such as internal and external corners of 90 and 135 degrees, make **PROTOP T** an elegant and much sought after profile.

AREAS OF USE

PROTOP T in anodized and polished aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.



WARNINGS


Do not use **PROTOP T** in anodized and polished aluminium outdoors and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

MAINTENANCE

PROTOP T does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROTOP T**" according to the tile thickness and desired finish.
2. Cut "**PROTOP T**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "**PROTOP T**" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

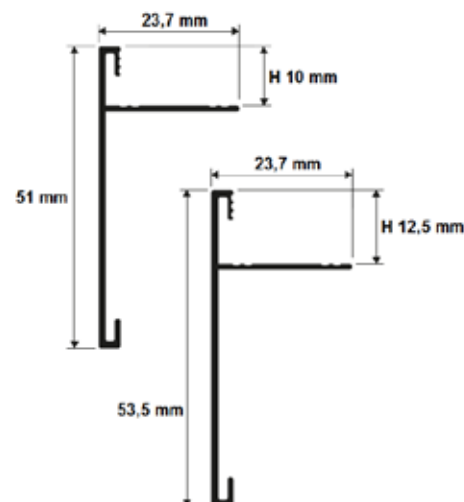

TEXT TEMPLATE FOR TENDERS

Delivery and installation of profile for kitchens in anodized silver aluminium / polished chrome aluminium. The profile, with a height of 10 and 12.5 mm, protects and decorates the edges of the top covered with tiles. Equipped with a punched flange that ensures a perfect grip to the adhesive and a vertical part with a height of 51 / 53.5 mm, like PROTOP T of the Progress Profiles company.

PCT... 10T/125T : Anodized silver aluminium and polished chrome aluminium

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt